




# KYC TOUCH

MANUALE DI ISTRUZIONE  
INSTRUCTION MANUAL  
NOTICE D'INSTRUCTION  
BEDIENUNGSANLEITUNG  
MANUAL DE INSTRUCCION  
EL KİTABI  
使用手冊  
取扱説明書



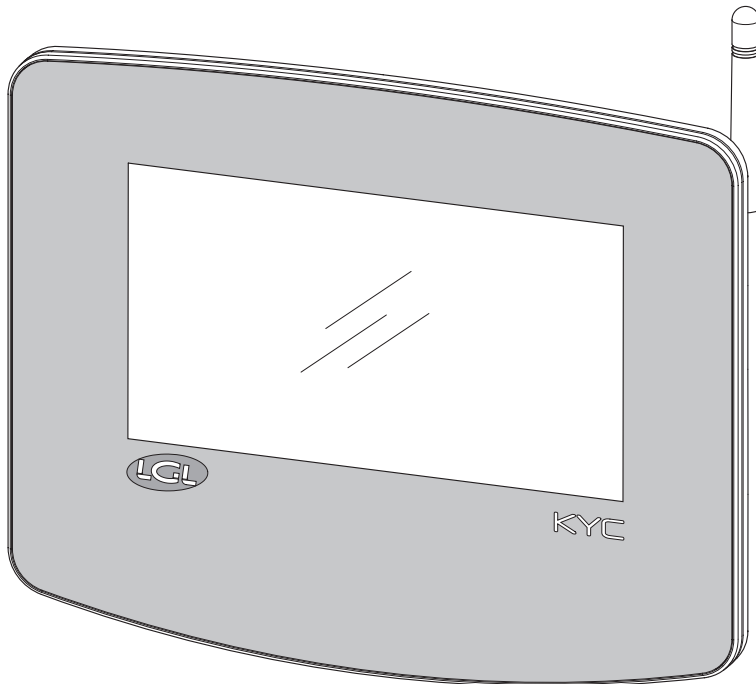

Scope of supply: Design, manufacture and after sales service of yarn and weft feeders, measuring winders, stands, creels and oil systems for textile machinery.

TRADUZIONI DELLE ISTRUZIONI ORIGINALI.  
 TRANSLATION OF THE ORIGINAL INSTRUCTIONS.  
 TRADUCTIONS DES INSTRUCTIONS D'ORIGINE.  
 ÜBERSETZUNG DER ORIGINALANLEITUNGEN.  
 TRADUCCIÓN DE LAS INSTRUCCIONES ORIGINALES.  
 ORJINAL TALÍMATLARIN TERCÜMESİ.  
 原始使用说明的翻译。  
 オリジナル命令を翻訳。

INDOOR USE ONLY

	AT	BE	BG	CH	CY	CZ	DE
	DK	EE	EL	ES	FI	FR	HR
	HU	IE	IT	IS	LI	LT	LU
	LV	MT	NL	NO	PL	PT	RO
	SE	SI	SK	TR	UK (NI)		


L.G.L. Electronics is gratified by your choice  
and thanks you for the preference

# communication interface INSTRUCTION MANUAL

# KYC TOUCH

ISSUED BY:

Service  
Manager

Handwritten signature of Luca Franchi in black ink.

Date: 01/07/2026

APPROVED BY:

Technical  
Manager

Handwritten signature of Giovanni Pedrini in black ink.

Date: 01/07/2026

# WARNINGS



## **Power supply**

- Use only the cable with custom connector and power the device according to the manufacturer's instructions;
- Do not make connections with wet hands;
- Make sure the cable and/or connector are not damaged before use;
- Avoid passing the cable through areas where it can be crushed or damaged;
- In the event of a malfunction, do not open the device. Contact the Manufacturer and disconnect the power connector;
- Install the device in systems that comply with current regulations;

## **Use and maintenance of devices**

- Keep the device away from heat sources (such as radiators);
- Do not place the device on inclined or unstable surfaces;
- Do not place the device on vibrating surfaces;
- Do not expose the device to corrosive materials, water, steam, and do not keep it in humid places;
- Do not expose the device to the risk of impact or shock;
- In any case, do not touch exposed electrical circuits. Contact could cause an electric shock;
- Before proceeding with cleaning operations, disconnect the device from the power supply. To clean the external surfaces, use a soft, dry or slightly damp cloth. Avoid the use of solvents and chemical products, which can compromise the quality of the components.

Please read this manual carefully and keep it for future reference. The manufacturer is not responsible for damage caused by misuse or incorrect application of the instructions.

This publication may include inaccuracies or typographical errors. The following information is subject to periodic changes that will be included in subsequent versions and made available on company website.

Improvements and/or changes to the product and software described in this document may be made at any time without notice.

# WARNINGS



## **Disposal**

The decommissioned device must be disposed of in accordance with the regulations in force in the user's country regarding the disposal of devices with electronic components.

## **Declaration of conformity**

The company LGL ELECTRONICS S.P.A. with registered office in Via Ugo Foscolo, 156 – 24024 Gandino (BG), as manufacturer, declares under its own responsibility, that the product Brand LGL Model: KYC Touch, is operating with the following parameters:

- Operating frequency 2.4 GHz: 2.400 - 2.4835 GHz
- Operating frequency 5 GHz: 5.15 – 5.35 GHz , 5.47 – 5.725 GHz
- Max Power E.I.R.P. at the frequency 2.4 Ghz: 16.59 dBm;
- Max Power E.I.R.P. at the frequency 5 Ghz: 17.68 dBm;
- Firmware Version: IW416-V0, RF878X, FP91, 16.91.10.p214, WPA2\_CVE\_FIX 1, PVE\_FIX 1

**and complies with the RED Directive 2014/53/EU.**

The full declaration of conformity is available in the attachment at the end of this manual.

# INDEX

<b>1</b>	<b>GENERAL FEATURES</b>	<b>8</b>
<b>2</b>	<b>MAIN SCREEN</b>	<b>12</b>
2.1	Machine in run state (main screen background color is green)	12
2.2	Machine in stop state (main screen background color is red)	14
<b>3</b>	<b>FEEDERS IN ALARM</b>	<b>15</b>
<b>4</b>	<b>READ/WRITE PARAMETERS</b>	<b>16</b>
4.1	Parameter change	17
4.2	Parameter for feeders in the selected group	18
4.3	Change parameter's value	19
4.4	Create/manage groups	21
4.5	Groups associations	23
<b>5</b>	<b>SMART UTILITY FUNCTION</b>	<b>24</b>
5.1	Offset	25
<b>6</b>	<b>INFORMATION</b>	<b>26</b>
6.1	Diagnostic page	27
6.2	KYC firmware update	28
<b>7</b>	<b>ACCESS LEVEL</b>	<b>31</b>
<b>8</b>	<b>GENERAL SETTINGS</b>	<b>33</b>
8.1	Network settings	34


# INDEX

<b>9</b>	<b>KLS FUNCTION</b>	<b>35</b>
9.1	KLS function with belt sensor	36
<b>10</b>	<b>YCM FUNCTION (YARN CONSUMPTION)</b>	<b>39</b>
10.1	YCM: feeders in group	40
10.2	Yarn settings	41
10.3	YCM general settings	42
10.4	Belt feeder settings	43
10.5	YCM report save on USB pen	46
<b>11</b>	<b>GRAPH OF PARAMETERS</b>	<b>49</b>
<b>12</b>	<b>SYNCHRONOUS YARN FEEDING FUNCTION (SYF)</b>	<b>52</b>
12.1	SYF tuning	55
12.2	SYF in standby mode	56
<b>13</b>	<b>YARN SPEED CONTROL (YSC)</b>	<b>57</b>
13.1	YSC tuning	58
13.2	YSC procedure	59
<b>14</b>	<b>YCC FUNCTION</b>	<b>60</b>
<b>15</b>	<b>CAM SETTINGS (AVAILABLE FROM SOFTWARE VERSION 4.32)</b>	<b>67</b>
<b>16</b>	<b>WARPER FUNCTION (ONLY FOR TWIN FEEDERS)</b>	<b>71</b>
<b>17</b>	<b>DATA ANALYSIS AND REMOTE CONTROL</b>	<b>73</b>


# 1 - GENERAL FEATURES

The KYC device is a communication interface that is connecting the user to the yarn feeders' system.


It is made by a 7 inches display and by some connectors for I/O devices.

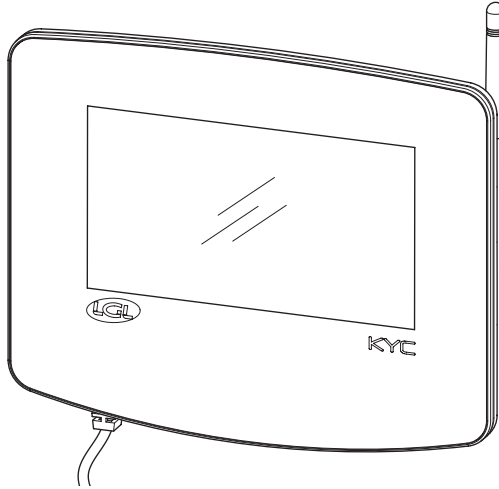

Pic. 1

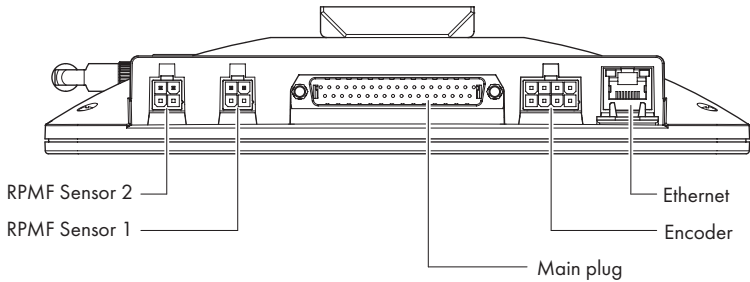

Pic. 2

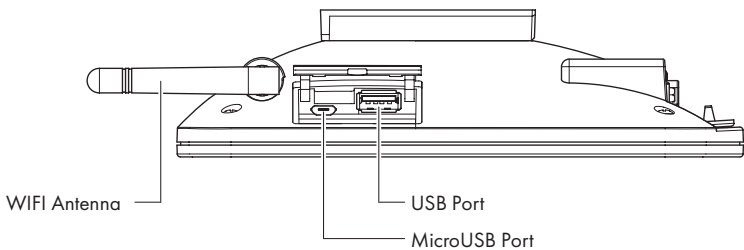

# 1 - GENERAL FEATURES

## **Intended uses:**

The KYC device is a communication interface that is connecting the user to the yarn feeders' system.

It is made by a 7 inches display and by some connectors for I/O devices.

## **Unintended uses:**

Unintended uses are all uses not explicitly indicated in Intended uses, in particular:

- electrical power supply different from the one specified
- use of the machine in an explosive atmosphere.


## **Functional features:**

- Simultaneous management of all installed feeders on the machine. Allows the same functions via laptop/tablet (USB) and ERP systems (wifi-ethernet).
- The machine configuration can be saved and loaded later.
- KLS: automatic machine stop in case of yarn break after the feeder
- YCM: information on yarn consumption
- YCC: automatic machine stop if yarn consumption is outside the set range
- YSC: Synchronization of yarn consumption for a selected group of feeders
- SYF: Synchronization of yarn consumption for a selected group of positive feeders
- Remote technical assistance
- Predictive maintenance

# 1 - GENERAL FEATURES

## Technical features:

- Dimensions (W x H x D): 230x180x48 (mm)
- Weight: 800 g
- Power supply: 48V – 60V DC //Current limit 1A (fuse)

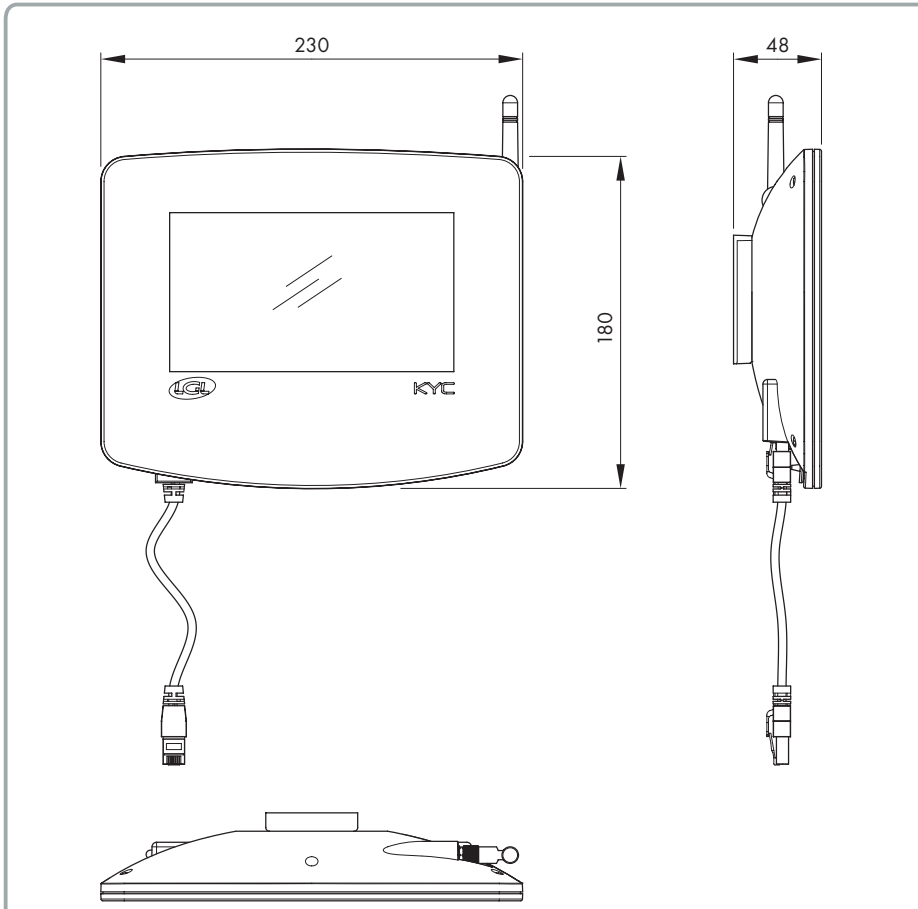

## Operation and storage conditions:

- Operating temperature: +10°C to +40°C
- Storage temperature: -20°C to +70°C
- Operating relative humidity: 10% to 90%
- Storage relative humidity: 5% to 95%

## Power supply:

Max active power 10W

# 1 - GENERAL FEATURES

## Ports and interfaces:


MAIN	Power, 3 isolated CANBUS, Run, Round pulse, Stop, Inverter Speed, Optional In/Out Signals
LAN	1 LAN port via RJ45 socket (standard Ethernet 10-100 Base-T)
USB	1 USB host controllers (version 2.0) 1 Micro USB
BELT SENSORS	2 Molex 4p Belt sensors connectors
ENCODER	1 Molex 8p incremental encoder connector
WIRELESS LAN	Wireless access point with support wireless LAN radio networks IEEE 802.11b – 11 Mbit/s IEEE 802.11a/g – 54 Mbit/s IEEE 802.11n – 150 Mbit/s

## Radio frequencies

Frequency	Range frequencies	Total RF Power	Antenna Peak Gain
2,4 GHz	2.400-2.4835 GHz	16.59 dBm	2.8 dBi
5 GHz	5.15 – 5.35 GHz	17.68 dBm	4.5 dBi
	5.47 – 5.725 GHz		


## 2 - MAIN SCREEN

### 2.1 MACHINE IN RUN STATE (MAIN SCREEN BACKGROUND COLOR IS GREEN)

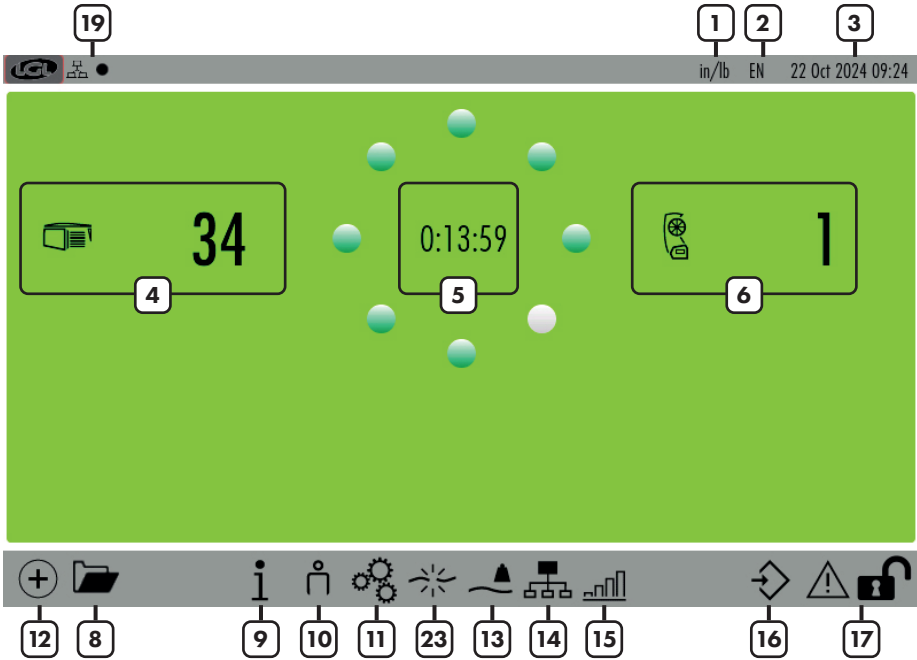



Pic. 3

By pressing  (icon **12**)



Pic. 4

- 1= Unit of measure (to modify press settings icon ).
- 2= Language (to modify press settings icon ).
- 3= Date.
- 4= Number of LGL storage feeders connected.
- 5= Timer (It tells from how long the machine is running or it is standing. It resets when the machine changes state RUN-STOP).
- 6= Number of LGL POSITIVE feeders (TWIN or SPIN) connected.

## 2 - MAIN SCREEN

- 7= Smart Utility function (see chapter 5).
- 8= Open stored configuration files.
- 9= Information about device (see chapter 6).
- 10= Access level (User or Advanced. Icon 10 is USER. See chapter 7).
- 11= General settings (see chapter 8)
- 12= Page change icon.
- 13= YCM function (see chapter 10).
- 14= Groups and parameters (see chapter 4)
- 15= Parameter graph (see chapter 11).
- 16= Present configurations saving.
- 17= Press and hold to lock the screen (useful to clean the screen).
- 18= SYF function (see chapter 12).
- 19= Network status:




= LAN. The black dot blinks when the device is connected. If there is no connection, the black dot is not present.




=WIFI. The black dot blinks when the device is connected. If there is no connection, the black dot is not present.

- 20 = YSC function (see chapter 13).
- 21 = Warper function (see chapter 16).
- 22 = Data analysis and remote control (see chapter 17).
- 23= KLS function (see chapter 9).
- 24= YCC function (see chapter 14).
- 25= Cam settings (see chapter 15).

Press and hold  (top left button) to take a screenshot (there must be an external USB key inserted). The image will be saved in the "Screenshot" folder.

## 2 - MAIN SCREEN

### 2.2 MACHINE IN STOP STATE (MAIN SCREEN BACKGROUND COLOR IS RED)

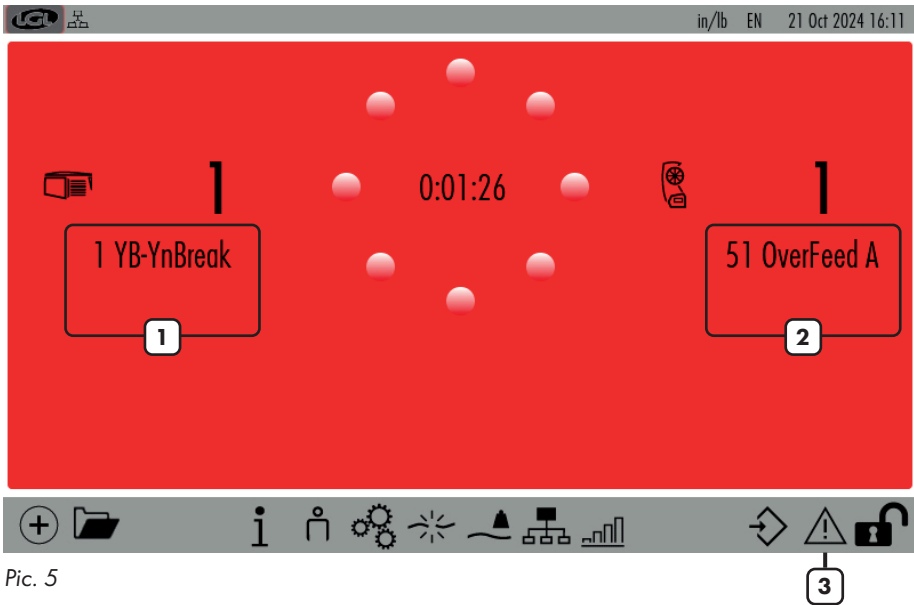


Pic. 5

- 1= Negative feeder ID in alarm with short alarm string.
- 2= Positive feeder ID in alarm with short alarm string.
- 3= Alarm detail (see chapter 2).


### 3 - FEEDERS IN ALARM

The alarm comes out on the screen as in the following picture:

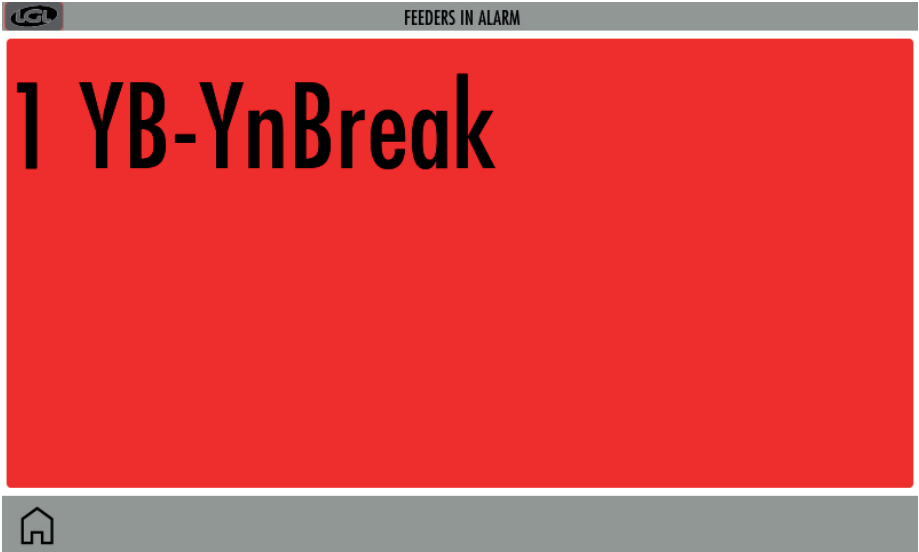

Pic. 6


Pressing  and then  or , picture 7 appears. A list of all feeders in alarm shows up. Press each button to have more information.

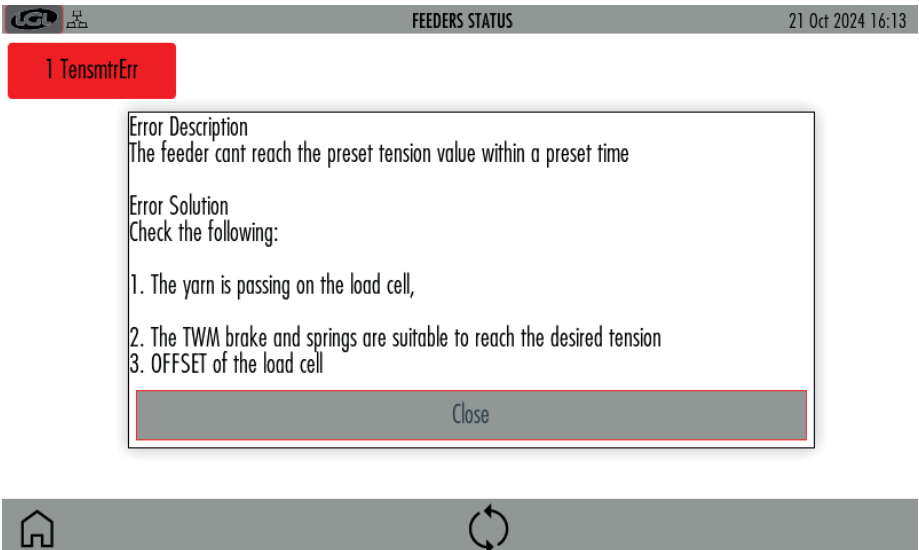

Pic. 7

# 4 - READ/WRITE PARAMETERS

From main screen (picture 3) press  icon:

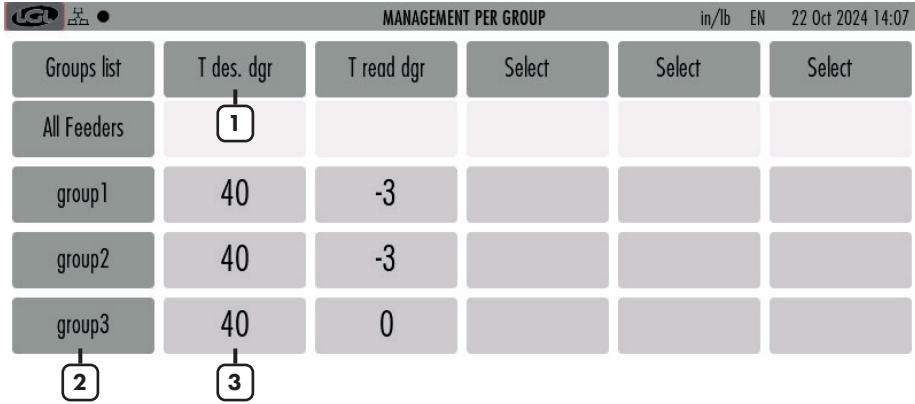


Groups list	T des. dgr	T read dgr	Select	Select	Select
All Feeders	40				
group1	40	-3			
group2	40	-3			
group3	40	0			



Pic. 8

On this page you can see, for each group of feeders, 5 parameters. The reported value is the one read by the first feeder of each group.

- 1= Press the parameter's name or the "Select" button to change the viewed parameter (see chapter 4.1).
- 2= Press group button to view information for each feeder of that group (see chapter 4.2).
- 3= Press the button with the value to change the parameter value for all feeders in the group. If it is read-only, a message will appear (see chapter 4.3).




Pic. 9

- 4= Press to create/manage groups (see chapter 4.4)
- 5= Press to delete this configuration.

# 4 - READ/WRITE PARAMETERS

## 4.1 PARAMETER CHANGE

On the screen of picture 8 press the parameter's name or "Select":

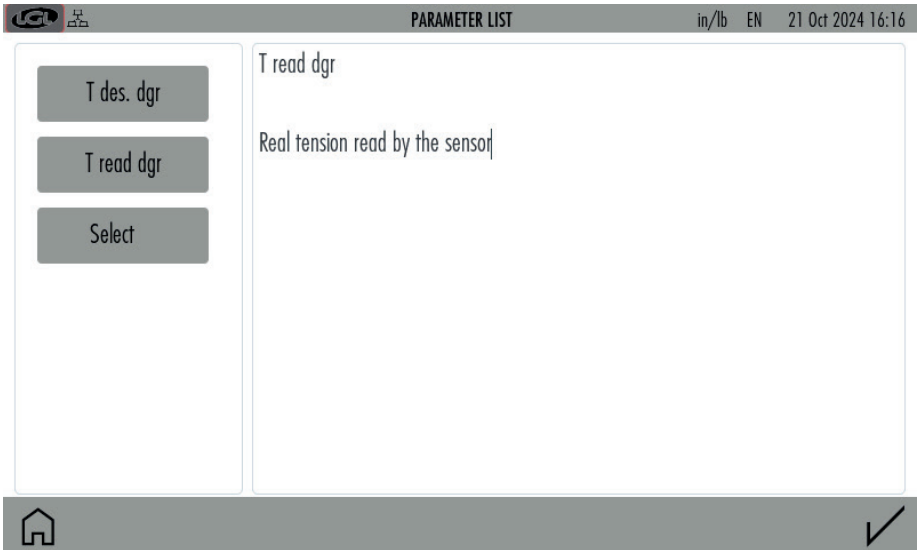

Pic. 10

All the parameters available in the group will appear.  
Press on parameter button, right side a description of the parameter appears.

# 4 - READ/WRITE PARAMETERS

## 4.2 PARAMETER FOR FEEDERS IN THE SELECTED GROUP

On the screen of picture 8 press group button:

PARAMETERS MANAGEMENT		in/lb	EN	22 Oct 2024 14:02	
group3	T des. dgr	T read dgr	YR-YarnRig	BR-BrkRate	TE-TensErr
51 TWN2039	40	0	5	1	-75



Pic. 11

- 1= Press to move among the groups.
- 2= Press the button with the parameter name or "Select" to change the parameter to view.
- 3= Press the button to change the parameter on the single feeder or on all feeders in the group. See chapter 4.3. If it is read-only, a message will appear (see picture 9).
- 4= Press and insert feeder number to view single feeder values.
- 5= Information: number of feeders in the group.

# 4 - READ/WRITE PARAMETERS

## 4.3 CHANGE PARAMETER'S VALUE

Press the button number 3 in picture 8. This is related to one group and the following picture will appear:

PARAMETER VALUE CHANGE		in/lb	EN	22 Oct 2024 09:03
Selected group:	group1			
Release:	ECM2054	1	2	3
Parameter	T des. dgr	4	5	6
Present Value:	40	7	8	9
		+/-	0	.
Insert new value		<	Bksp	>

Home icon | ✓

Pic. 12

## 4 - READ/WRITE PARAMETERS

Press the button with the value to change the value on one feeder, and the following picture will appear:

The screenshot shows a control interface titled "PARAMETER VALUE CHANGE" with a status bar at the top right displaying "in/lb EN 21 Oct 2024 16:19". The interface consists of several rows of input fields and a numeric keypad on the right. The rows are: "Feeder:" with a text box containing "51" and a callout "1"; "Release:" with a text box containing "TWN2039"; "Parameter" with a text box containing "T des. dgr"; "Present Value:" with a text box containing "50"; "Change to all feeders" with a checkbox and a callout "2"; and "Insert new value" with an empty text box and a callout "3". The numeric keypad on the right contains buttons for digits 1-9, "+/-", "0", ".", "<", "Bksp", and ">".




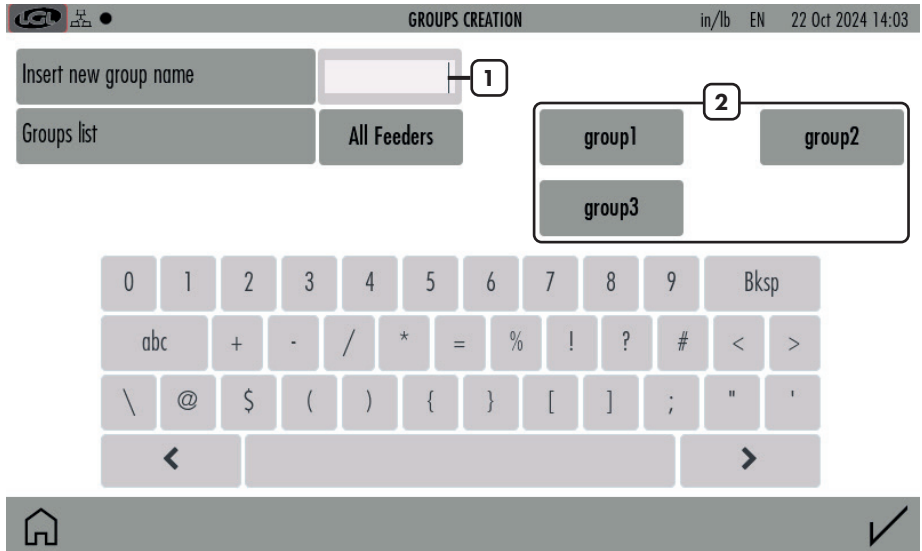
Pic. 13

- 1= Feeder number (Pic 13) or group name (Pic. 12).
- 2= It is visible only if you are viewing a specific group. If selected, the parameter value will change for all feeders in the group. Otherwise only for the selected feeder (in the example feeder number 5).
- 3= Insert new value and press ✓.

# 4 - READ/WRITE PARAMETERS

## 4.4 CREATE/MANAGE GROUPS

From parameters screen (picture 8) press  icon:



Pic. 14

- 1= Insert the name of the new group and press ✓ to add it in the list.
- 2= List of created groups

To delete or rename a created group, press and hold the name of the group in the list 2.

## 4 - READ/WRITE PARAMETERS

The following picture appears:



Pic. 15

It is possible to modify the group name. Confirm with ✓.


Cancel the group by pressing —.

As soon as all groups have got their names, press ✓ to continue with the next step, which consists in associating each feeder with its group (4.5).

# 4 - READ/WRITE PARAMETERS

## 4.5 GROUPS ASSOCIATIONS

Picture 16 appears:

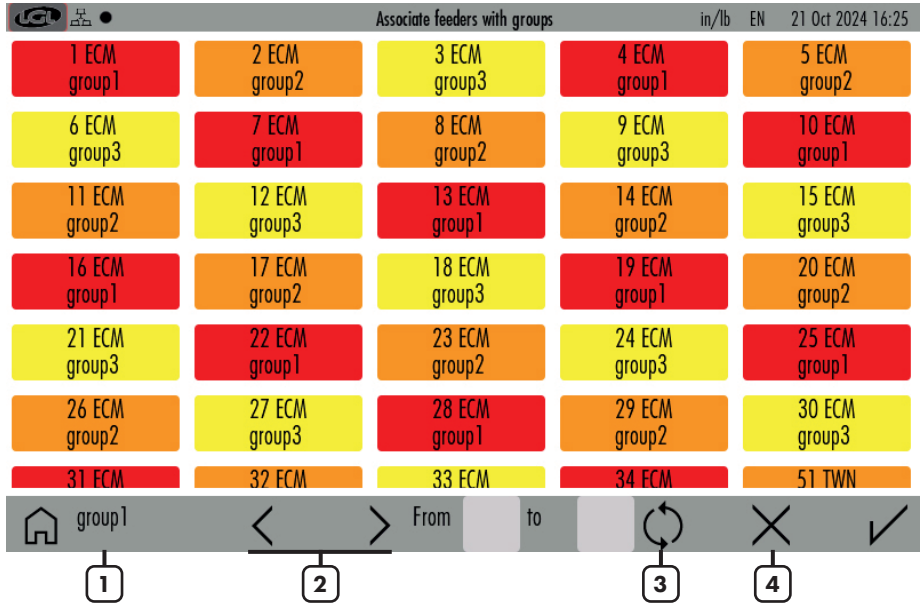


Pic. 16

- 1= Present group name to perform association. Tap on the feeder square to associate the feeder to the group. When the feeder is associated, its square takes a strong color (feeders in the same groups will have the same color). If one feeder is not yet associated with any group, its square is light grey.
- 2= Move among the groups through the arrows.
- 3= Repeat the association to all remaining feeders.  
To be used in case the association repeats.
- 4= Delete the association.

In the end press ✓ to confirm association.

## 5 - SMART UTILITY FUNCTION

From main screen (picture 3) press  icon:

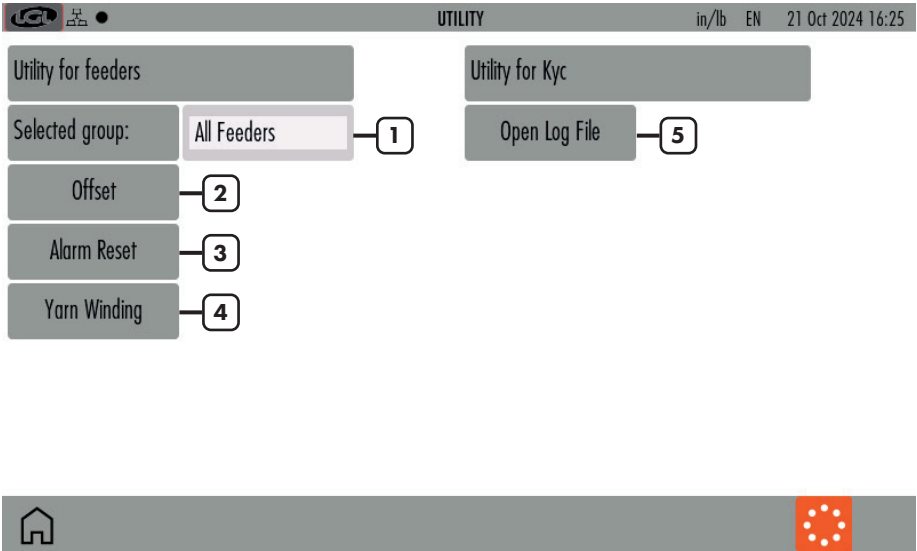

Pic. 17


- 1= Press to select the group of feeders to deal with.
- 2= Offset command (see chapter 5.1).
- 3= Alarm reset command: Reset alarm on selected devices.
- 4= Yarn winding command: only on SPIN and TWIN feeders. Due to this command, feeder can be handled (to thread the yarn for example) without producing reactions from the tension sensors. Feeders do not move.
- 5= Open a log file (located on the SD card) with alarms records coming from the feeders.

# 5 - SMART UTILITY FUNCTION

## 5.1 OFFSET

This procedure is related to devices equipped with tension sensor. To be made when by removing the yarn from the tension sensor, the read tension is not zero.

Press "Offset" button:

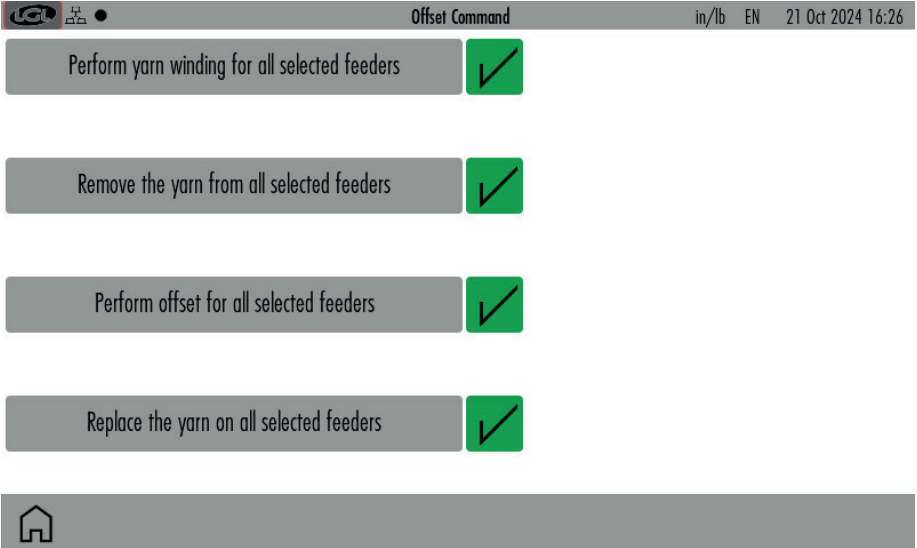

Pic. 18

There are 4 buttons, execute the command written in each button and then press ✓.

First button is valid only on positive feeders TWIN and SPIN. For storage feeders, press this button without any action and go to the second button.


Second button requires to remove the yarn from all load cells. This is very important.

Third button to be pressed only when the action written in the second button has been performed. This button performs the OFFSET command.

Last button reminds to put the yarn back on the load cell.

## 6 - INFORMATION

From main screen (picture 3) press **i** icon:

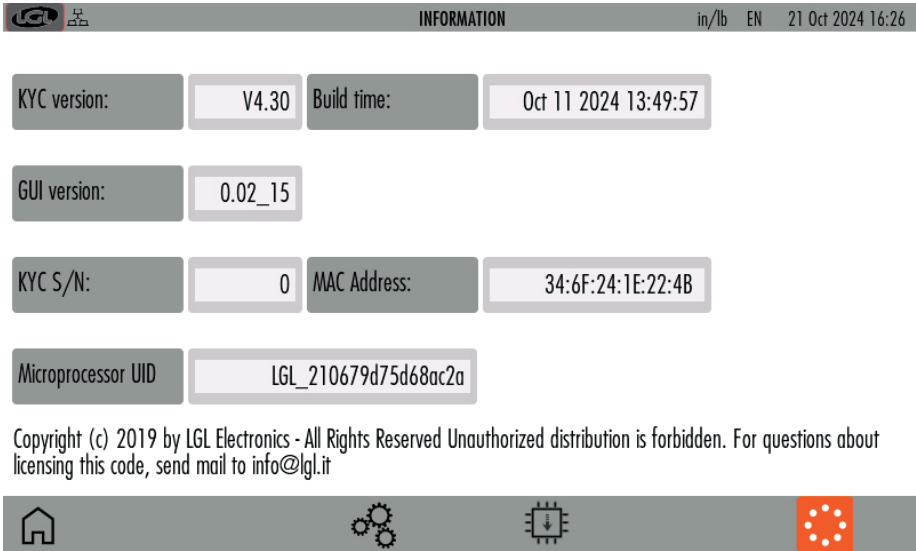

Pic. 19

In this screen the information about device software and hardware is provided.

The icons on the bottom bar are described in the related chapter:




= Diagnostic page (see chapter 6.1)




= KYC firmware update (see chapter 6.2)

# 6 - INFORMATION

## 6.1 DIAGNOSTIC PAGE

From picture 19 press  icon:

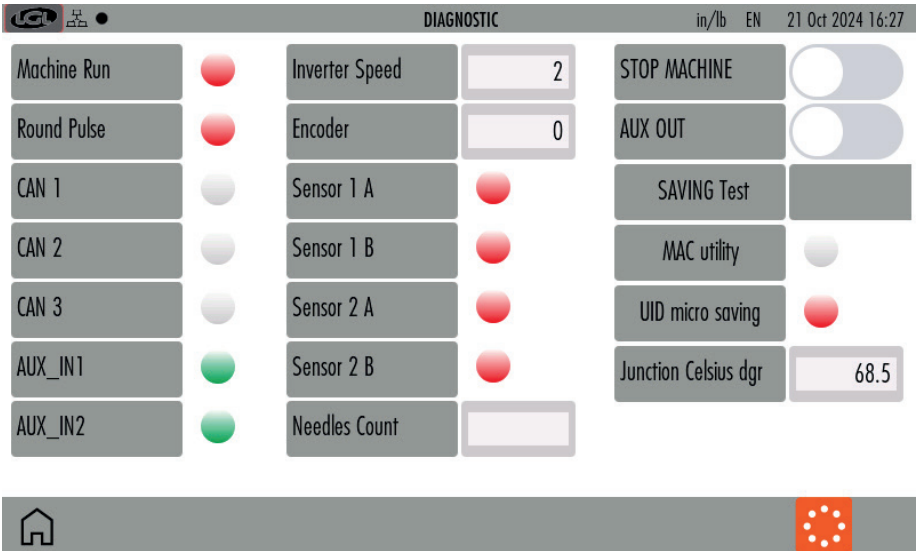

Pic. 20

This screen allows to execute some tests on the signals used by the KYC.

**Machine RUN:** when the machine starts, the signal goes from red to green. If this does not happen, the connections between KYC and machine must be checked.

**Round Pulse:** This signal counts the machine turns used for yarn consumption information. It blinks every time the machine beam passes on the revolution sensor. If the signal did not blink at each machine turn, the yarn consumption information could be wrong.

**Inverter Speed:** This is a number from 0 to 255 that increases when the machine speed increases, and it decreases when the machine speed decreases.

**Encoder:** If it is connected to the KYC (option), the incremental steps are displayed while the encoder is turning. The KYC uses the Encoder with TWIN feeders to handle their yarn consumption.

**Sensor 1A, 1B, 2A, 2B:** These concern the two LGL-RPMF sensors (Chapter 9.1 and 10.4). The signal blinks at each turn of the wheel installed on the belt.

**MACHINE STOP:** STOP signal test. Moving the cursor to the right, the KYC stops the machine allowing a test of the STOP signal going from the KYC to the machine.


**SAVING TEST:** Test to check if the memory save procedure is correct.

The other voices are for LGL technicians and are not concerning signals tests.

# 6 - INFORMATION

## 6.2 KYC FIRMWARE UPDATE


Copy file "KYCTouch4.XX.sec" and the "FILE" folder in the USB root of a USB pen. Insert the USB pen into the KYC device (Pic. 21):

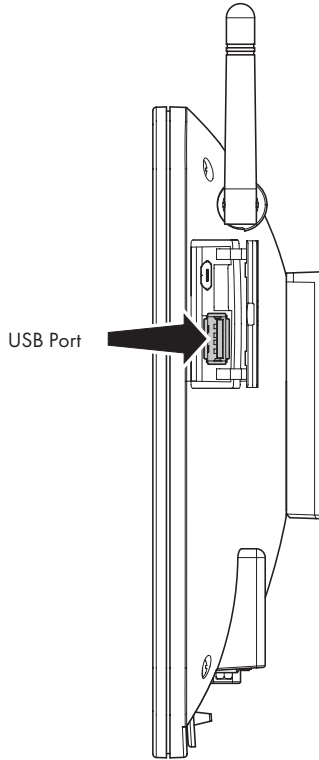

Pic. 21


## 6 - INFORMATION

From main screen, press **i** and then  :

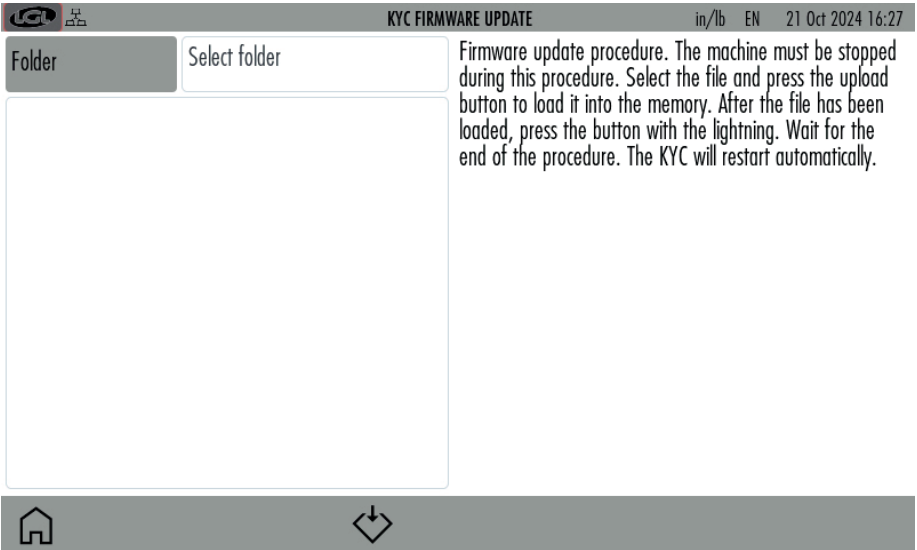


Pic. 22


Press "Select folder" to select the USB root.

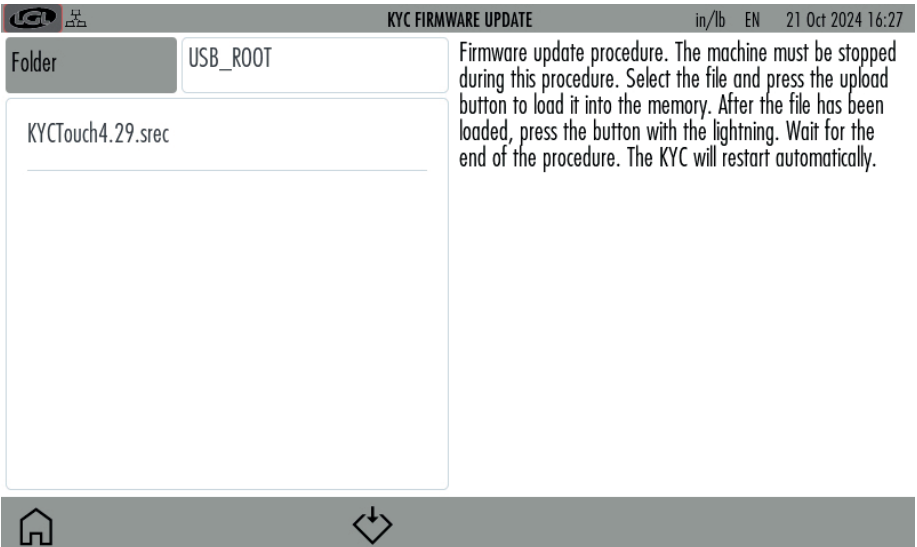


Pic. 23

## 6 - INFORMATION

Select file "KYCTouch4.XX.srec" and press  to copy the file on the KYC device. A green bar shows the copy in progress. At the end the green bar reaches 100% and it disappears. An icon with thunder shape appears .

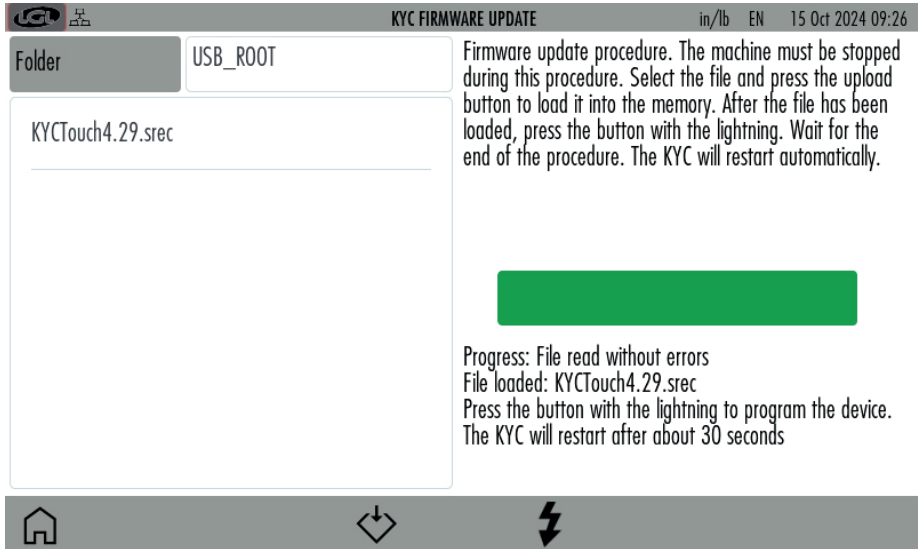

Pic. 24

Pressing icon  the file will be executed, the KYC device turns off and it turns back on after 15 seconds, ready to be used.

**NOTE: the system file of the USB pen must be FAT or FAT32.**



## 7 - ACCESS LEVEL


This function allows the operator to set a password to modify parameters on the KYC screen. Two user type have been created: BASE USER and ADVANCED USER. It is possible to create a password for each user.

BASE USER can only display information

ADVANCED USER can display and modify parameters.

The system is set to ADVANCED USER by default and it stays like this if no password is set. By inserting a password for ADVANCED USER, the system can be used as a BASE USER or as an ADVANCED USER.

From main screen (picture 3) press  or  icon:

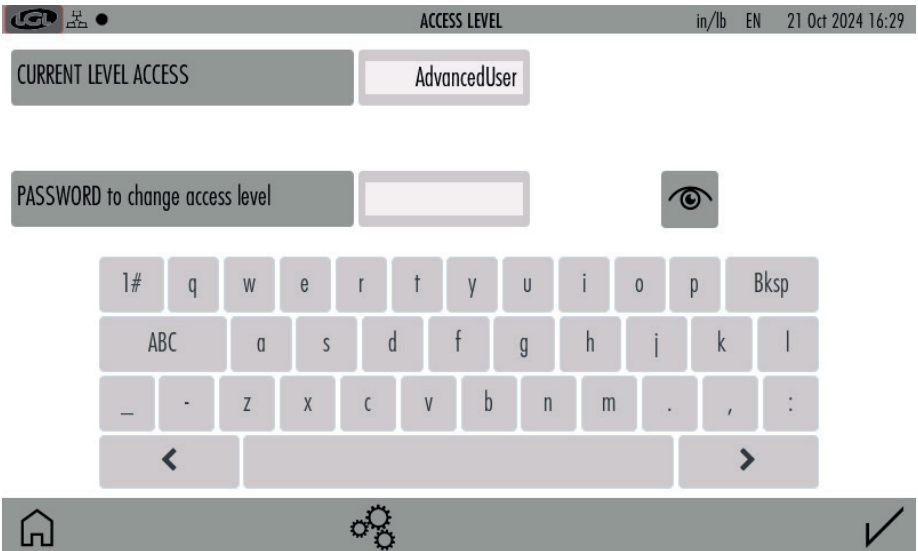

Pic. 25


## 7 - ACCESS LEVEL

To set the password, press on  icon (Pic. 26):



The screenshot shows a 'CHANGE PASSWORD' interface. At the top, there's a status bar with a home icon, signal strength, and the text 'CHANGE PASSWORD in/lb EN 21 Oct 2024 16:29'. Below this are four input fields: 'Select User' (containing 'ADVANCED USER'), 'Old password', 'New Password', and 'Confirm Password'. An eye icon is positioned to the right of the 'Old password' field. A virtual keyboard is displayed below the input fields. At the bottom of the screen, there is a dark grey bar with a home icon on the left and a checkmark icon on the right.


Pic. 26


Press "Select user" and choose ADVANCED USER, insert password and press  icon. First time do not write anything in the "old password" field.

**Important: keep the password in a safe place.**

On the main screen (Pic. 3) the BASE USER is identified by icon .


Pressing this icon, you get access to picture 25, where you can pass to ADVANCED USER by inserting the password.

ADVANCED USER is identified on the main screen by icon .


Although possible, it is not strictly necessary to set a password for BASE USER, being this the most limited user. To go back to the base user, press  without inserting any password.


## 8 - GENERAL SETTINGS

From main screen (picture 3) press  icon:

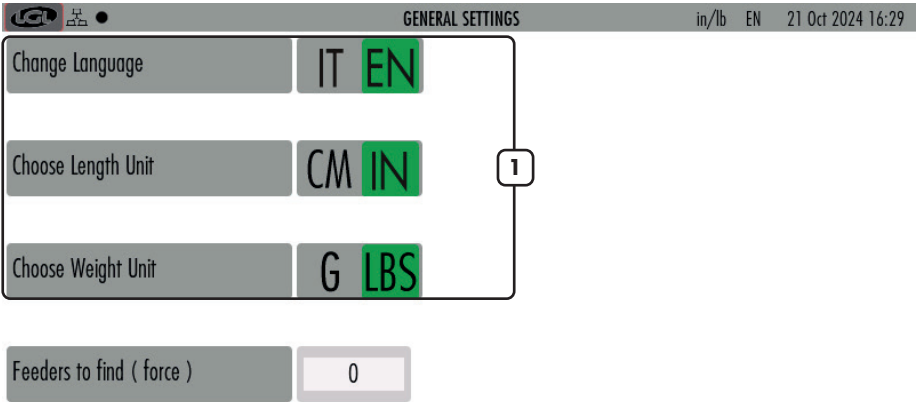

Pic. 27




- 1= Press to change unit of measure.
- 2= Network settings (see chapter 8.1)
- 3= Date and clock settings
- 4= Brightness and sleep time settings
- 5= Send file to USB external device. Select the file to send and press > to send it to a USB key device. If you want to delete a file in a SD card, select file and press  (see chapter 10.5)

# 8 - GENERAL SETTINGS

## 8.1 NETWORK SETTINGS

Press  icon:

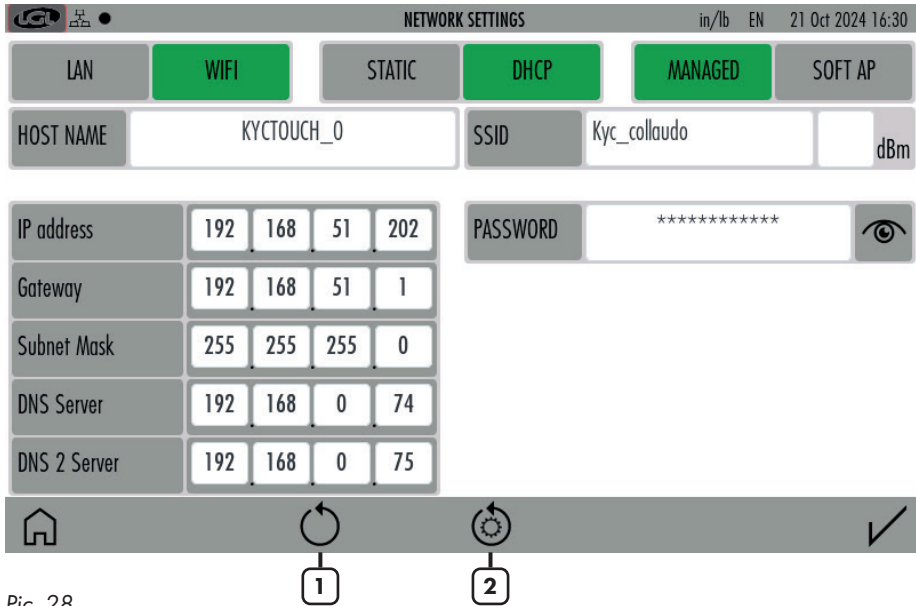

Pic. 28

Modify settings and press ✓ to confirm.


1= Press to scan available access points.

2= Press to reset to default network settings. Press ✓ to confirm.

## 9 - KLS FUNCTION


KLS function allows feeders to stop the machine if the yarn gets broken between the feeder and the machine (For more information see feeders' manual). This function requires a connection with machine inverter and needs a machine run signal.

On picture 27 (or on picture 3 depending upon versions) press ☀ icon; there are two operation modes: standard mode takes the inverter and run signals from the machine; Belt mode takes the same signals from a wheel installed on a belt (LGL RPMF sensor):

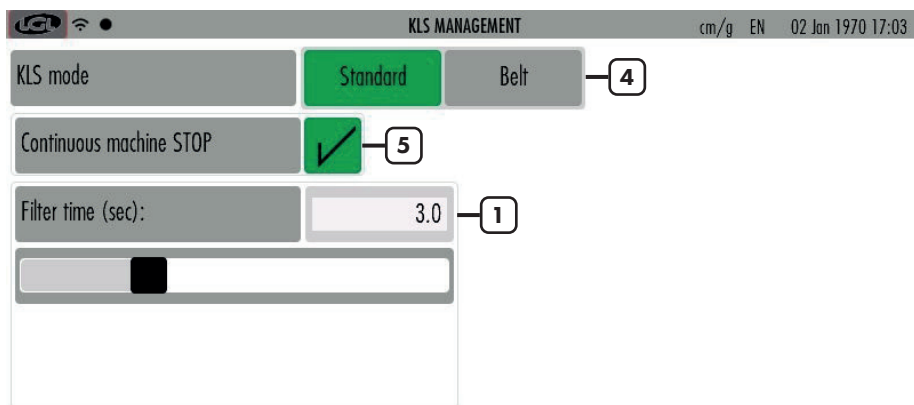

Press START to execute calibration of the output stop motion system.

Do not change default parameters without LGL support



Pic. 29

- 1= Move slide to change KLS "Time filter" (default value 3seconds). This is the time the machine takes to reach production speed.
- 2= Stop KLS control (the machine must be standing).  
**Attention: the machine won't stop if the yarn gets broken between the feeder and the machine.**
- 3= Start KLS control. This button activates the kls system calibration. Start the machine and run it for at least 10 seconds. The stop the machine and re start it. See feeder instructions manual for more information.
- 4= To select where the system takes the RUN and the inverter signal: from the machine or from the LGL RPMF sensor (see chapter 9.1).
- 5= Continuous stop:
  1. Enabled (Green square). After a stop due to an alarm coming from the feeders, the machine can't move before the alarm has been reset manually.

## 9 - KLS FUNCTION

2. Disabled (Red square). After a stop due to an alarm coming from the feeders, the machine can move.


Default= Disabled (red square).

Time filter correct timing is 3 seconds which corresponds to the time the machine needs to get to production speed after a start.

### 9.1 KLS FUNCTION WITH BELT SENSOR


The KLS function with belt sensor allows feeders to stop the machine if the yarn gets broken between the feeder and the machine, without the use of the inverter signal and the run signal coming from the machine.

Picture 30 shows one LGL-RPMF sensor to be installed on a belt. The sensor has two wheels, and the system handles maximum two sensors.

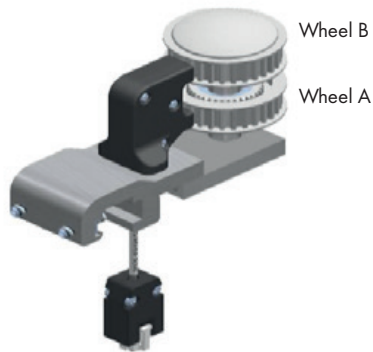


Pic. 30

# 9 - KLS FUNCTION

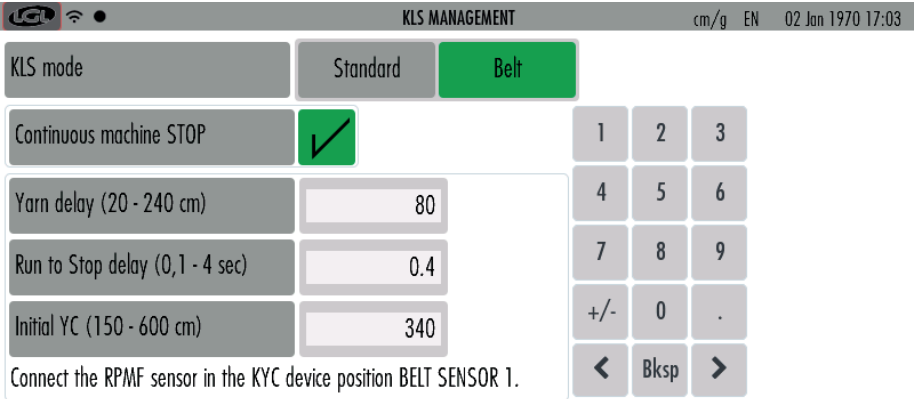

Pic. 31

- Connect the LGL-RPMF to the connector for the LGL- RPMF sensor 1 (see picture 32) . The KYC will recognize the sensor automatically.

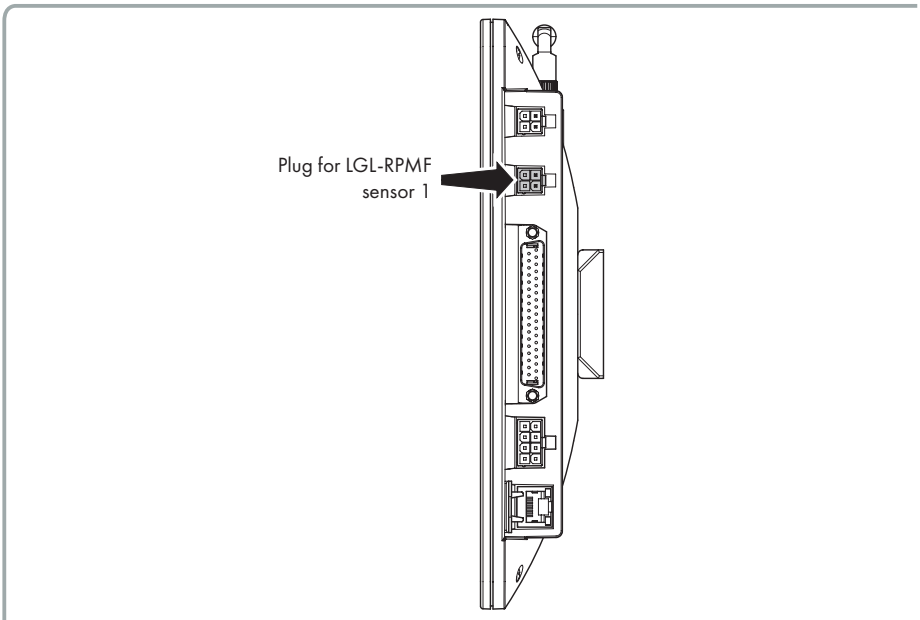

Pic. 32

## 9 - KLS FUNCTION

- b. Select "belt" on the KLS management page (Pic. 31).
- c. If necessary, change the parameters:
  - Yarn delay ( 20-240cm; default 80cm )
  - Run to stop delay ( 0,1 – 4 sec; default 0,4 seconds )
  - Initial Yarn consumption ( 150-600 cm; default 340 cm )

The values in the pictures are the default ones, and they are OK in most cases.


**NOTE: This function is enables only on LGL-RPMF sensor 1.**

Please make sure that the belt is turning the lower wheel, because the signal is taken form the lower wheel (the Wheel A in picture 30).

The two wheels of the RPMF sensor can be connected to two belts and execute the yarn consumption feature of the belt feeders (chapter 8): the lower wheel will be engaged in two tasks at the same time (see chapter 10.4).

# 10 - YCM FUNCTION (YARN CONSUMPTION)

From main screen (picture 1) press  icon:

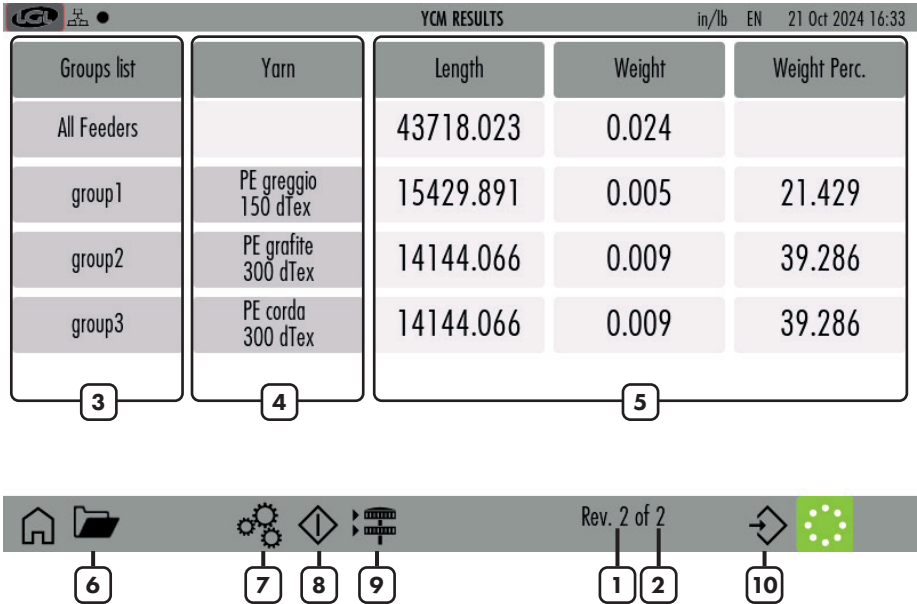

Pic. 33


- 1= Machine revolution Counter
- 2= Complete pattern revolutions.
- 3= List of feeders' groups. Press on each group button to view data for the feeders in each group (see chapter 10.1)
- 4= Yarn settings for each group. Press "Yarn" to change settings (see chapter 10.2)
- 5= Yarn consumption values
- 6= Open stored YCM settings
- 7= YCM general settings (see chapter 10.3)
- 8= YCM Start/Stop
- 9= Belt feeder settings (see chapter 10.4)
- 10= YCM report saving

To get yarn consumption data, the information described in chapter 10.2, 10.3 and 10.4 must be entered in the system.

The information about machine revolutions in chapter 10.3 is compulsory to get some data. Information shown in chapter 10.2 is required to have the weight and the weight percentage. If this information is not entered, the system will return only the yarn length in centimeters.

# 10 - YCM FUNCTION (YARN CONSUMPTION)

Belt feeders' settings in chapter 10.4 are necessary in case belt driven feeders are installed on the machine. In this case the system will provide the yarn consumption information of the belt driven feeders together with the LGL devices.

Once the system has been filled with all information, press button  (number 8 in picture 33) to start the calculation. Data will appear on the screen only when the machine gets to the end of the programmed revolution number.

## 10.1 YCM: FEEDERS IN GROUP

Press one group button. For example, press "group2" in picture 33.

Picture 34 appears:



group2	Yarn	Length	Weight	Length 100 needles
2 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945
5 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945
8 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945
11 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945
14 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945
17 ECM2054	PE grafite 300 dTex	9798.000	2.939	7714.945

Control bar:  Go to feeder    Rev. 50 of 50  

Buttons 1, 2, and 3 are indicated below the control bar.

Pic. 34

- 1= Insert a feeder number to view single feeder yarn consumption values.
- 2= YCM Start/Stop.
- 3= Press to keep repeating YCM calculation.

# 10 - YCM FUNCTION (YARN CONSUMPTION)

## 10.2 YARN SETTINGS

In Picture 33 press the button next to the group name to insert yarn information:

The screenshot shows the 'YARN SETTING' interface. At the top, there is a header bar with a home icon, a group icon, and the text 'YARN SETTING' followed by 'in/lb EN 21 Oct 2024 16:35'. Below the header, there are four main input areas: 'Selected group:' with a text box containing 'group1'; 'Yarn Type:' with a text box containing 'PE greggio'; 'Yarn Count:' with a text box containing '150'; and 'Unit of measure:' with a row of radio buttons for 'dTex' (checked), 'Tex', 'den', 'Nec', 'New', 'Nej', and 'Nm'. Below these fields is a virtual keyboard with keys for numbers, letters, and symbols. At the bottom, there is a navigation bar with a home icon, a close button (X), and a checkmark icon.

Pic. 35


Insert yarn setting for the feeders in the selected group (in this example "group 1"): yarn type, yarn count and measure unit.

The yarn type box can be filled with any feature which characterize the yarn or the pattern. The yarn consumption will make use of the yarn count only.

# 10 - YCM FUNCTION (YARN CONSUMPTION)

## 10.3 YCM GENERAL SETTINGS

From YCM main screen (picture 33) press  icon:

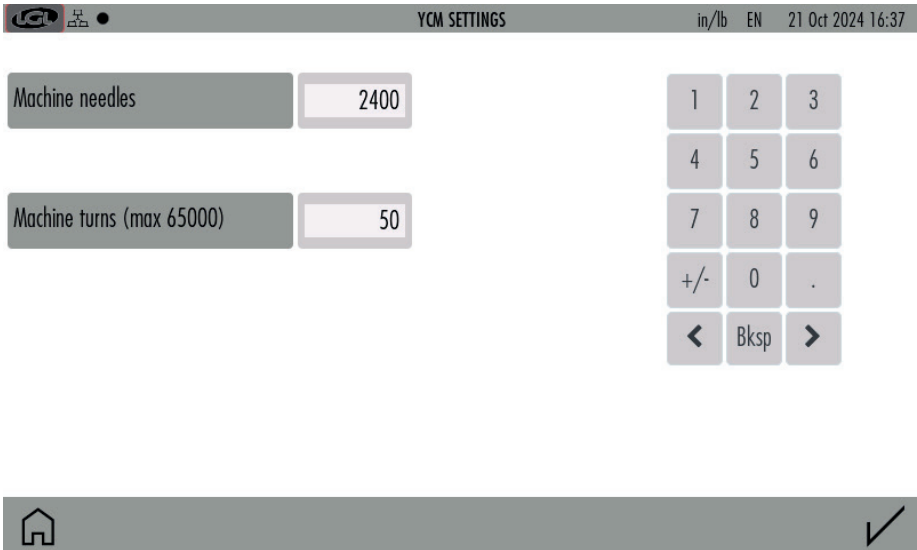

Machine needles

Machine turns (max 65000)

1	2	3
4	5	6
7	8	9
+/-	0	.
<	Bksp	>

Home icon ✓

Pic. 36

Insert machine revolution and machine needles to calculate YCM. Information about machine needles is required to provide the length per 100 needles.


# 10 - YCM FUNCTION (YARN CONSUMPTION)

## 10.4 BELT FEEDER SETTINGS

The sensor described in this chapter is necessary to calculate the yarn consumption of the belt driven feeders.

When belts sensors are installed, the yarn consumption result will include the length, the weight and the weight percentage of the yarn processed by the total amount of belt feeder connected to the same belt.


For example, if there are 4 wheels which calculate the yarn consumption of 4 belts each belt being connected to a group of belt feeders processing the same yarn, four more voices will be included in the yarn consumption results, one for each belt.

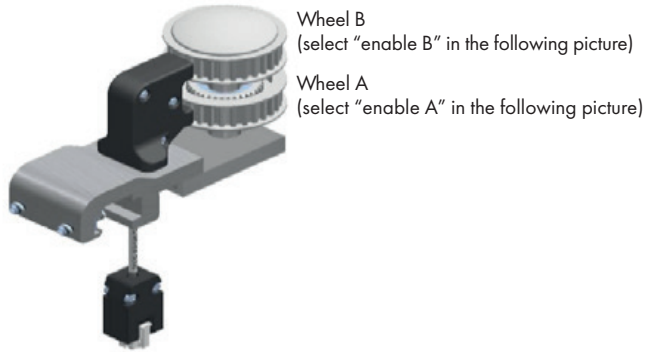

Pic. 37

# 10 - YCM FUNCTION (YARN CONSUMPTION)

From YCM main screen (picture 33) press  icon:

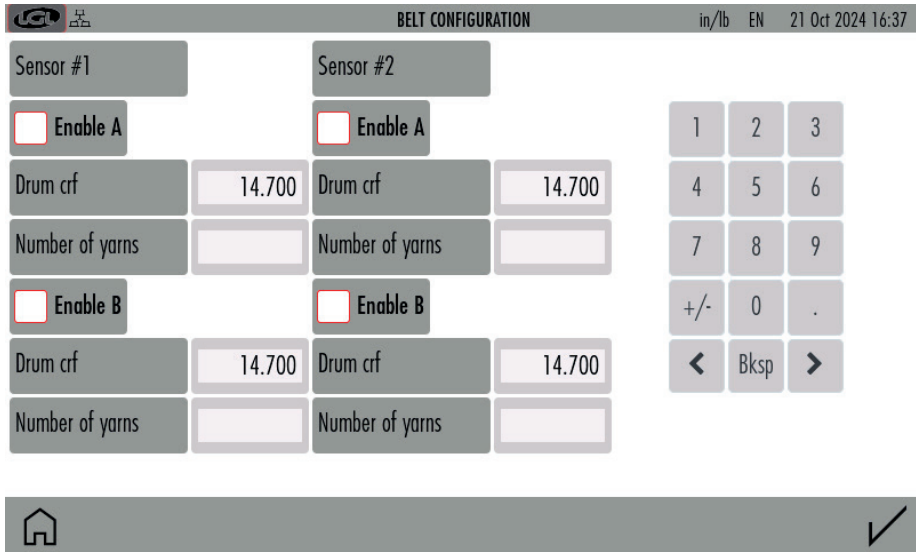

Pic. 38

Select "Enable A" and/or "ENABLE B" to enable belt feeders sensors. Each sensor can process up to two belts (A and B) and there are two sensors. The maximum belts number is four.

- Drum crf is the circumference of the belt feeder drum. Insert 14,7cm (default value). As alternative, it is possible to wind up 10 wraps on the belt feeder drum, manually measure the length of such an amount of yarn, divide the value by 10 and insert the value into the parameter. This procedure is more complex, but it is more precise.
- Number of yarns: how many feeds are supplying the same type of yarn. It is possible to use two different yarn types (one for each belt) for each sensor.

# 10 - YCM FUNCTION (YARN CONSUMPTION)

For example, enabling sensor number 1 and wheel A:

**BELT CONFIGURATION** in/lb EN 21 Oct 2024 16:38

Sensor #1	Sensor #2
<input checked="" type="checkbox"/> Enable A	<input type="checkbox"/> Enable A
Drum crf: 14.700	Drum crf: 14.700
Number of yarns: 24	Number of yarns:
<input type="checkbox"/> Enable B	<input type="checkbox"/> Enable B
Drum crf: 14.700	Drum crf: 14.700
Number of yarns:	Number of yarns:

Keypad: 1, 2, 3, 4, 5, 6, 7, 8, 9, +/-, 0, ., <, Bksp, >

Pic. 39

The yarn consumption result will include the percentages related to the LGL electronic feeders and the percentages related to the belt driven feeders:

**YCM RESULTS** in/lb EN 21 Oct 2024 16:39

Groups list	Yarn	Length	Weight	Weight Perc.
All Feeders		140876.891	0.091	
gruppo1	PE greggio 150 dTex	46289.672	0.015	16.872
gruppo2	PE grafite 300 dTex	42432.199	0.028	30.932
gruppo3	PE corda 300 dTex	42432.199	0.028	30.932
Sensor 1 A	lay in 900 dTex	9722.815	0.019	21.263


Rev. 49 of 50

Pic. 40

# 10 - YCM FUNCTION (YARN CONSUMPTION)

## 10.5 YCM REPORT SAVE ON USB PEN


Create and save (to save it press button  10 in picture 33) a YCM report. Insert a USB pen into the pertinent slot on the back of the KYC.

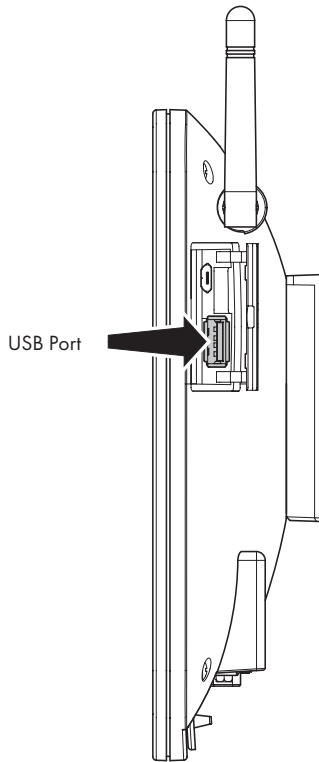

Pic. 41

From main page press  .

# 10 - YCM FUNCTION (YARN CONSUMPTION)

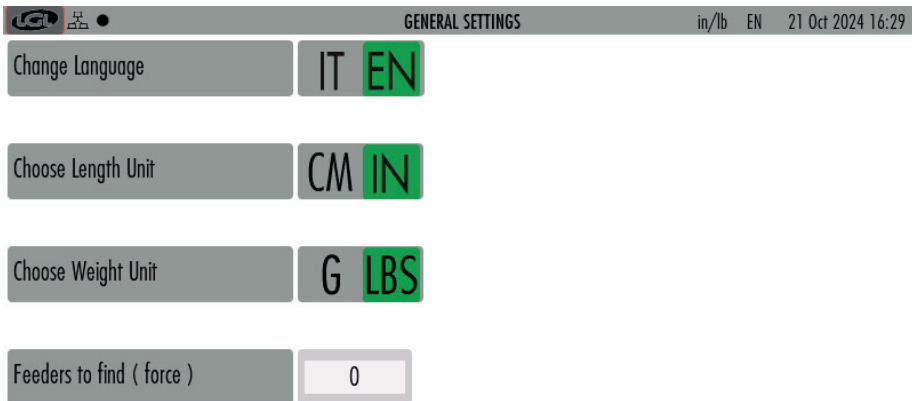

Pic. 42


Press 





Pic. 43


Press Select folder: a drop-down menu will appear. From the menu select YCM. The YCM files created and saved will be shown on the screen:
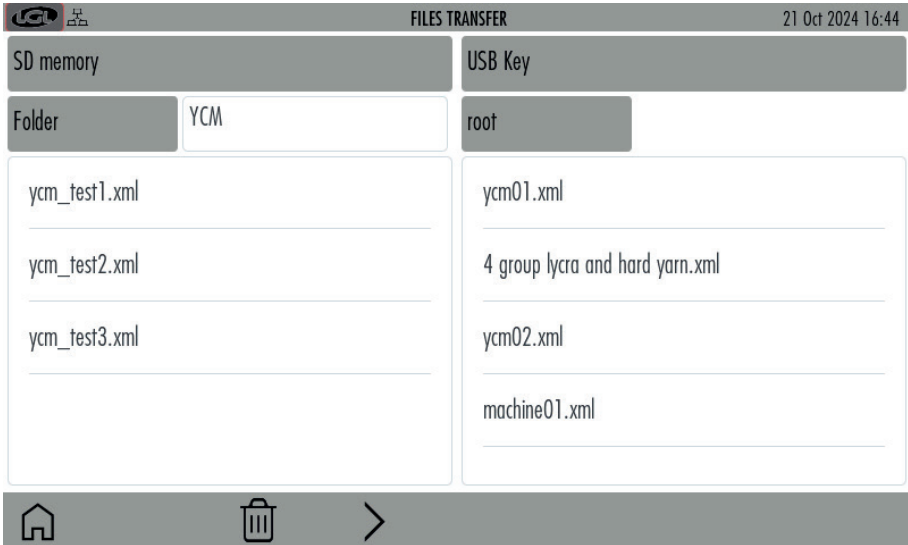
# 10 - YCM FUNCTION (YARN CONSUMPTION)



Pic. 44

Select the file you want to move to USB pen. Here I selected ycm\_test1.xml. Once the file has been selected, an arrow  appears bottom of the screen. Transfer the file to USB pen by pressing the arrow .

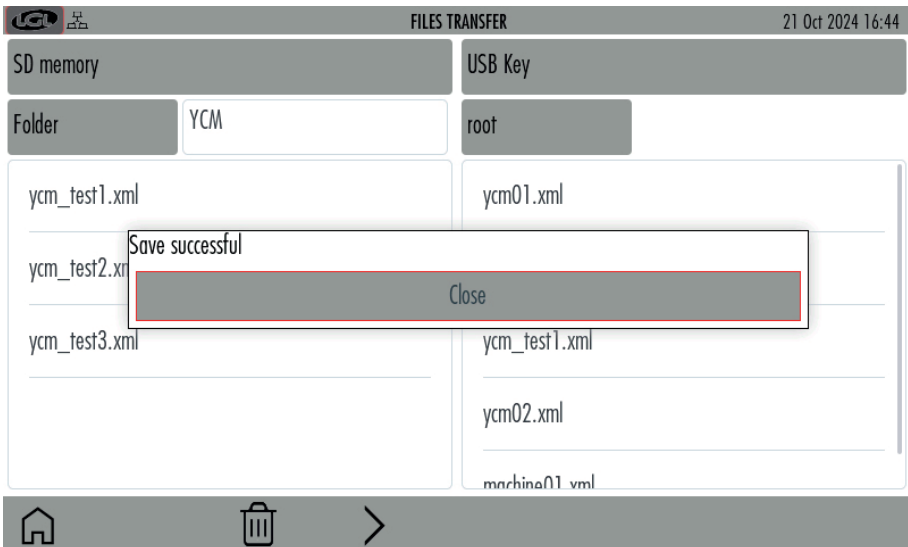

Pic. 45

As the picture shows, the file appears on the right part of the screen, where the files stored in the USB pen are located.

# 11 - GRAPH OF PARAMETERS



From main screen (picture 3) press  icon and then  :

CHART SETTINGS in/lb EN 21 Oct 2024 16:48

Single Feeder 51 1

Selected group: All Feeders 2

Selected Parameter: T des. dgr 3

Reference Value 50 4

Minimum Percentage 5 5

Maximum Percentage 5 6

1 2 3

4 5 6

7 8 9

+/- 0 .


< Bksp >

Pic. 46

- 1= Select if you want to see the chart of one feeder only.
- 2= Select if you want to see the graph of all feeders in the selected group. To select a group, press on "All Feeders".
- 3= Select parameter.
- 4= It is possible enter a reference value with a control percentage. If the read value differs from the input information, the feeder's bar on the chart will turn red.
- 5= Minimum allowed value (%).
- 6= Maximum allowed value (%).

# 11 - GRAPH OF PARAMETERS

In the end press icon ✓ to display the requested diagram:

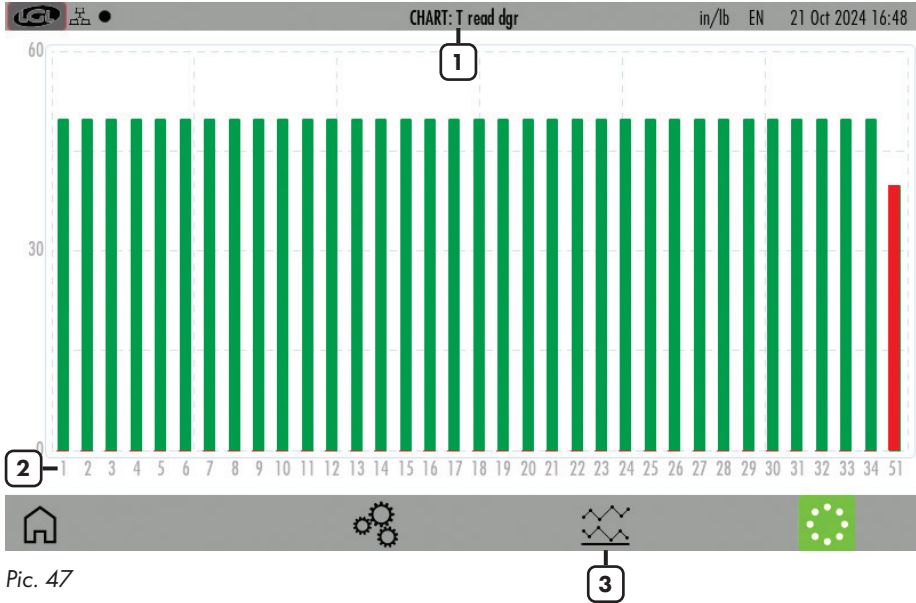


Pic. 47

- 1= Parameter shown (Tread in the example).
- 2= Addresses of the feeders. If the screen is not large enough to fit all feeders, some arrows will appear bottom of the screen to allow a scrolling.
- 3= Press to view chart of minimum and maximum read value (Pic. 48)

The diagram shown the parameter's value for all connected feeders. Each rectangle is green if its value is within the tolerance defined by the minimum and maximum percentage (Pic. 46). On the contrary if the value is out of tolerance, the rectangle is red.

# 11 - GRAPH OF PARAMETERS

The minimum and maximum values of the parameter are shown in picture 48. The blue line shows minimum values, while the red line shown maximum values. This diagram is important for read parameters coming from sensors, like the read yarn tension of this example.

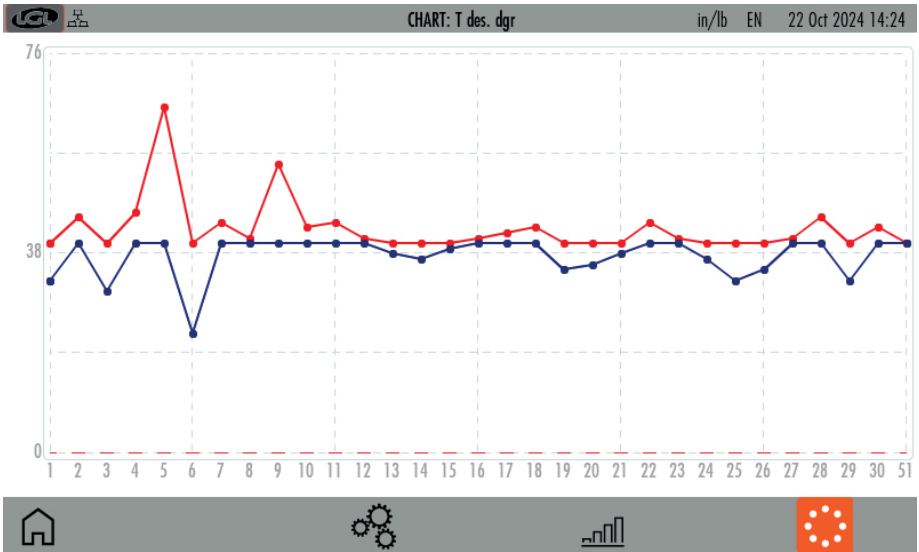


Pic. 48

## 12 - SYNCHRONOUS YARN FEEDING FUNCTION (SYF)

This function is available only on TWIN feeder equipped with board LGL272 and it is used to produce plain fabric. It is not available on any other LGL product.


The KYC system must be connected to an encoder synchronized with the machine (available in LGL). The encoder must be connected to the KYC through a connector designed for this purpose. And shown in the following picture:

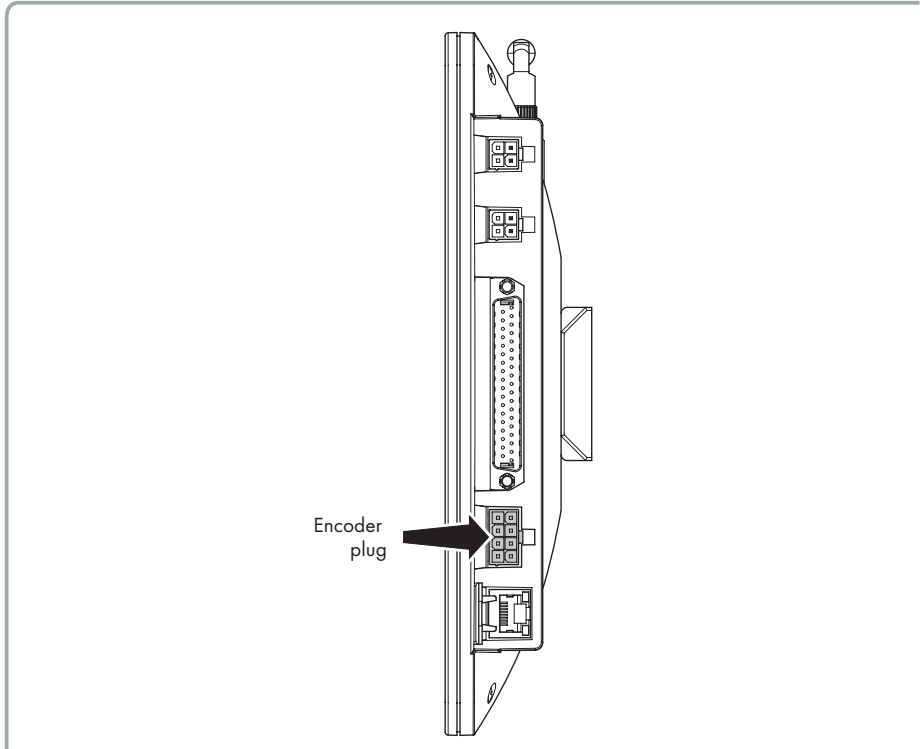


Pic. 49

The TWIN feeder works synchronous with the machine, thus releasing a constant amount of yarn. The tension sensor is used to provide the information about the yarn tension and to give alarms if the tension goes out of tolerance.

# 12 - SYNCHRONOUS YARN FEEDING FUNCTION (SYF)

From main screen press  icon:

		SYF FUNCTION			in/lb	EN	21 Oct 2024 16:52
Groups list	Status	T.des Coherence	Desired Value	T.des value			
All Feeders	Not consistent	Not consistent	40	40			
group1	ENABLED	Not consistent	40	40			
group2	ENABLED	Consistent	40	40			
group3	DISABLED	Consistent	0	40			
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>			



Pic. 50

- 1= Groups list.  
Press on each group tab to perform tuning (see dedicated sub-chapter 12.1)
- 2= Status of synchronous yarn feeding per each group (read only):  
ENABLED: SYF function enabled.  
All feeders in each group provide the same amount of yarn.  
DISABLED: SYF function disabled.  
All feeders in each group work with the tension sensor.  
Not consistent: The feeders in the group have different SYF values from one another.
- 3= Coherence of the desired tension value during tuning procedure.  
Consistent: All feeders in group have the same tension value  
Not consistent: All feeders in the group have different desired tension values.  
The desired tension values must be modified to be all same for the same group.


# 12 - SYNCHRONOUS YARN FEEDING FUNCTION (SYF)

- 4= Desired yarn consumption value in cm/revolution. Press to change value.  
This value can be set through the calibration procedure or it can be written directly in this position.

**NOTE: After pressing on the value, a new picture appears:**

The screenshot displays the 'PARAMETER VALUE CHANGE' interface. At the top, there is a header bar with the KYC logo, a gear icon, the title 'PARAMETER VALUE CHANGE', and the unit 'in/lb EN' along with the date and time '21 Oct 2024 16:52'. Below the header, there are four main input sections: 'Selected group:' with a dropdown menu showing 'group3', 'Parameter' with a dropdown menu showing 'Desired Value', 'Present Value:' with a text input field containing '0', and 'Insert new value' with an empty text input field. To the right of these sections is a numeric keypad with buttons for digits 1-9, '+/-', '0', '.', '<', 'Bksp', and '>'. At the bottom of the screen is a navigation bar with a home icon, a circle with a downward-pointing triangle (the SYF disable icon), and a checkmark icon.

Pic. 51


By pushing , the SYF function for the group will be disabled and each feeder will work in tension mode.

- 5= Desired tension. Press to change value. Also, in this case appears picture 51. Insert the new value in the pertinent box.

# 12 - SYNCHRONOUS YARN FEEDING FUNCTION (SYF)

## 12.1 SYF TUNING

Press a group tab in picture 50 to perform SYF tuning. The tuning sets a constant yarn consumption on the group. See Pic. 52:

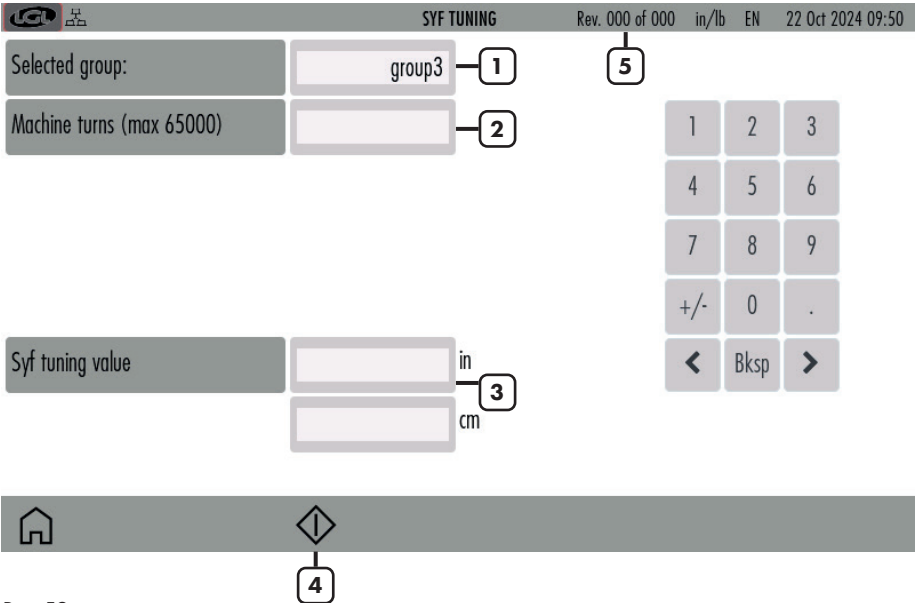

Pic. 52


- 1= Group selected.
- 2= Duration of the SYF tuning procedure in number of machine revolutions.
- 3= When the tuning procedure is over, the yarn consumption value will be shown here.
- 4= Press to start/stop tuning procedure.
- 5= The number of machine revolutions will increase from 0 to the preset value (see in box number 2) during tuning.


When the tuning procedure is over, the yarn consumption value is shown, and the symbol ✓ appears.

Press ✓ to send the value to all feeders and to enable the SYF function.

# 12 - SYNCHRONOUS YARN FEEDING FUNCTION (SYF)


## 12.2 SYF IN STANDBY MODE

This button  appears top right of the main screen if there are Twin feeders equipped with SYF function.

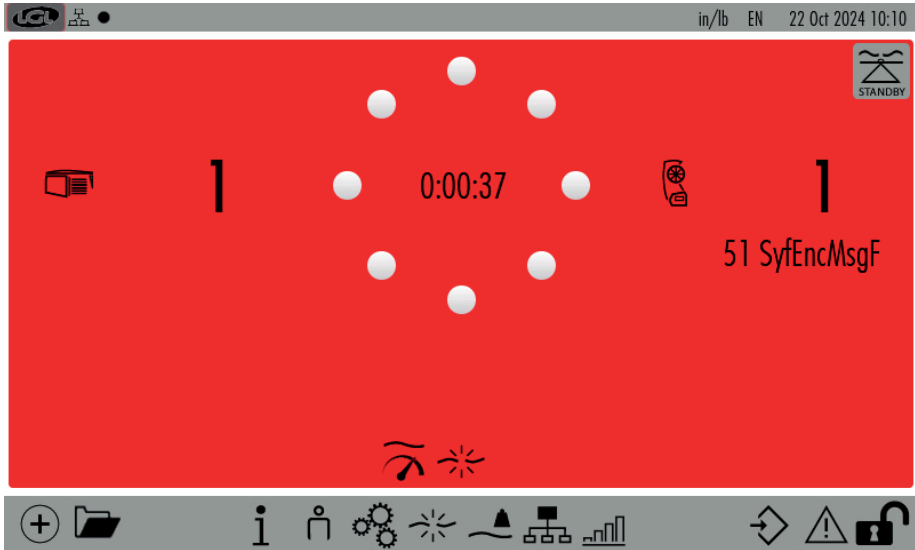

Pic. 53

This button allows the operator to stop the SYF function for five revolutions. Twin feeders will work in tension mode during these revolutions.

Press icon  (Pic. 53). TWIN feeders will change from consumption mode to tension mode. The feeders' lights will go from yellow (consumption mode) to green (tension mode).

Twin feeders will work in tension mode for five revolutions, then they will return automatically to Consumption mode.


# 13 - YARN SPEED CONTROL (YSC)

This function is available only on Ecompact and Ecopower feeders DC versions.

YSC is a function which allows the feeder equipped with ATTIVO system to control the yarn consumption reference (yarn consumption mode) during plain knitting fabric, and the tension reference (tension mode) during Jacquard patterns.

Feeders can automatically pass from one mode to the other when the pattern passes from plain to jacquard and viceversa.

From main screen (picture 4), press  icon:

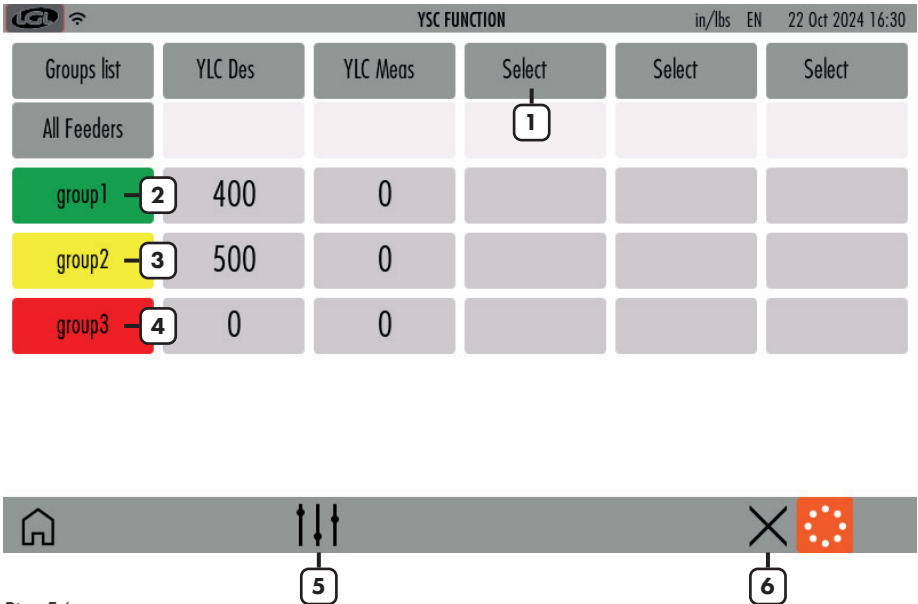


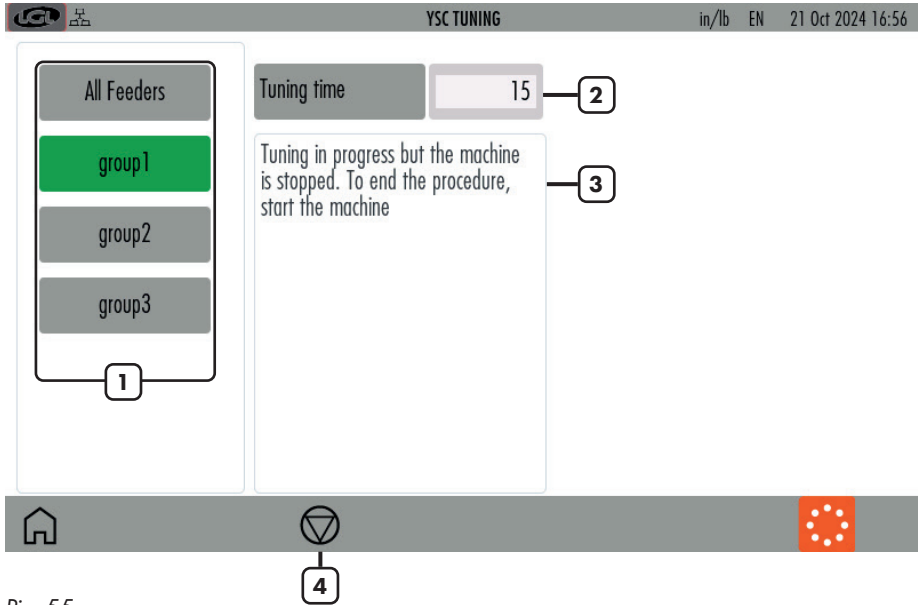
Pic. 54

- 1= Press to select YSC parameters (see chapter 13.2 which shows the engaged parameters).
- 2= The rectangle is green because the YSC is active and all feeders in the group have the same value
- 3= The rectangle is yellow because the YSC is active but there are the feeders with different values in the same group. In this case the calibration must be repeated.
- 4= The rectangle is red because the YSC is not active for all feeders in the group.
- 5= Tuning button (see 13.1 chapter).
- 6= Button to disable YSC to all feeders. Verify desired tension as it may have changed during YSC.

# 13 - YARN SPEED CONTROL (YSC)

## 13.1 YSC TUNING

From YSC screen press  icon:



Pic. 55

- 1= Press and hold to select or deselect a group (green= yarn consumption mode; grey= tension mode).
- 2= Change tuning time (default value=15. Normally it is not necessary to change this number).
- 3= Information: tuning in progress and end of procedure.
- 4= Button to start or stop tuning procedure.

# 13 - YARN SPEED CONTROL (YSC)

## 13.2 YSC PROCEDURE

The pattern must be plain, all feeders of the same group must consume the same amount of yarn. Select the groups which you require to run in yarn consumption mode.

If the machine is running, stop it.

Press tuning procedure button (number 4 in picture 55)

Run the machine and wait until the end of the tuning procedure. After about 30 seconds the tuning is over. From that moment on the YSC function is active and working.

In the YSC main screen each group working in consumption mode will be green and each feeder of the group will adjust the same yarn consumption by moving the Attivo brake. This means that the tensions values will change (and they will be different on each feed) to keep the preset yarn consumption.

Each group working in tension mode will be grey.

On the screen it is possible to display the parameters which are involved in this function:


- **YLC Meas:** this is the actual yarn consumption (read only, in cm/2s).
- **YLC Des:** this is the desired yarn consumption set during tuning procedure (read /write, in Cm/2s). Each feeder keeps this parameter constant by modifying the desired tension.
- **YLCT.min:** minimum tension permitted by YSC system (default 2g). If the yarn tension  $T_{des}$  gets to  $T_{min}$  during YSC working, YSC stays active, even if the tension won't go below  $T_{min}$ .
- **YLCT.max:** maximum tension permitted by YSC system (default 7g). If the yarn tension  $T_{des}$  gets to  $T_{max}$  during YSC working, YSC stays active, even if the tension won't go above  $T_{max}$ .

Both  $T_{min}$  and  $T_{max}$  can depend on the mechanics of the output brake. In fact the output brake could not be able to achieve a too high or a too low tension.

- **YLC%max:** maximum variation of real time yarn consumption above which YSC system is disabled. This parameter defines a limit between a plain area and a jacquard area of the same pattern. When the yarn consumption overcomes %max, it means that the pattern is no more plain and that feeder must work in tension mode. The tension each feeder adjusts is the very last it was adjusting during consumption mode (default 10%).
- **YLCTdesTun.:** tension of the ATTIVO system during tuning procedure. During tuning procedure ATTIVO is working in tension mode, and this is the tension at which the system records the yarn consumption parameters.

# 14 - YCC FUNCTION

YCC is a system which monitors the yarn consumption of each feeder during an article, and it stops the machine if the yarn consumption is out of tolerance with respect to a reference value. Available on storage feeders and on the KYC TOUCH from software version 4.40.

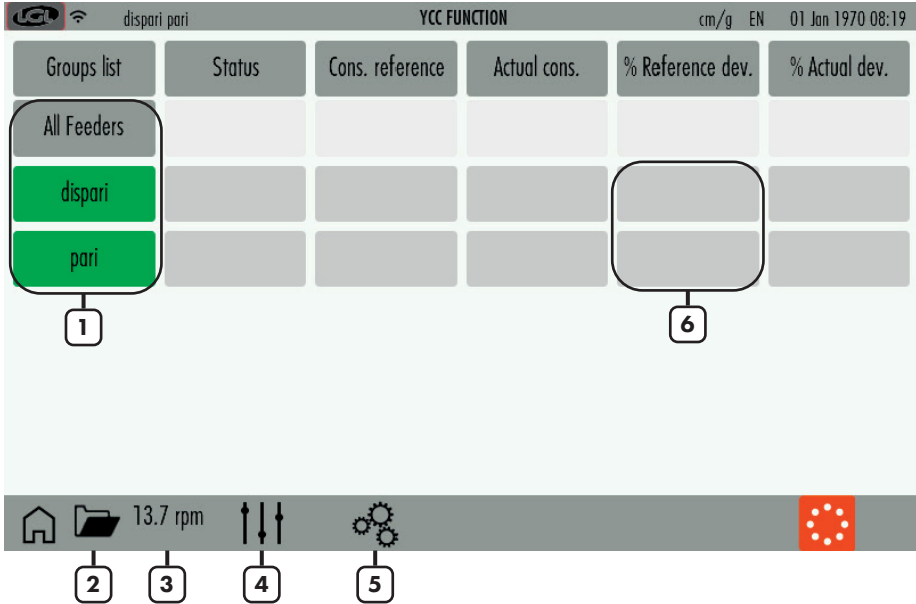

Pic. 56

1= Groups keys:

Each group key is green if the feeders of the group have the function enabled. It is red if the function is disabled. The key is yellow if there are feeders with the function enabled and feeders with the function disabled in the same group.

2= To open a saved configuration file.


3= Machine speed (rpm).


4= To start YCC function tuning.

5= YCC settings.

Holding 3 seconds one group key, the YCC function is enabled or disabled. (the key passes from red to green and viceversa).

# 14 - YCC FUNCTION


To use the YCC function, press settings key  :

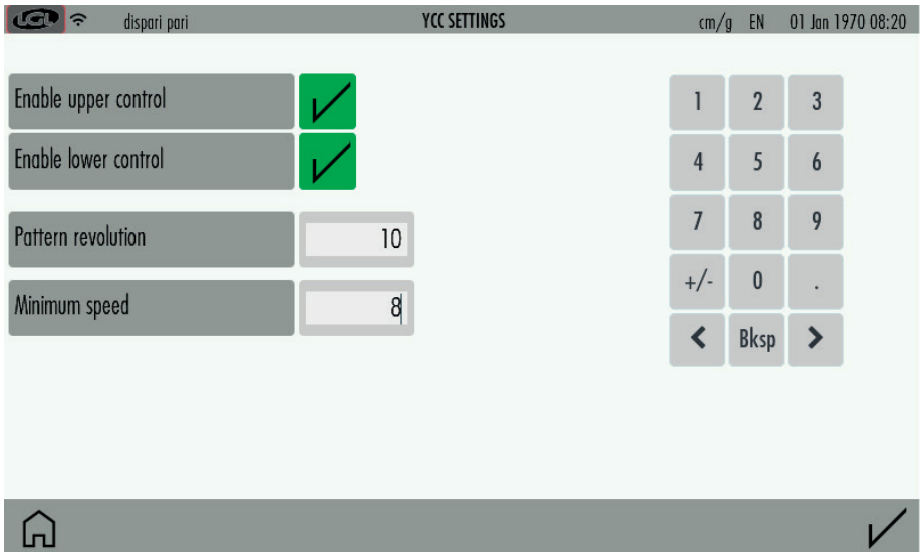

Pic. 57

Set the machine turns of the pattern (approximate to the nearest integer), the minimum working speed below which the system is not active and enable the desired checks (upper and/or lower check).

 disabled

 enabled

If “enable upper control” is selected, the system will stop the machine if the present value is higher than the reference yarn consumption + %reference deviation.

Similarly, if “enable lower control” is selected, the system will stop the machine if the present value is lower than the reference yarn consumption - %reference deviation.


## 14 - YCC FUNCTION

From the main screen set the %reference deviation by pressing the key of the desired group (number 6 on the picture):

The screenshot displays the 'PARAMETER VALUE CHANGE' interface. At the top, it shows the current group 'dispari pari', the title 'PARAMETER VALUE CHANGE', and system information 'cm/g EN 01 Jan 1970 08:29'. The main area contains several input fields: 'Selected group:' with 'dispari', 'Release:' with 'ECM2070', 'Parameter:' with '% Reference dev.', and 'Present Value:' which is empty. Below these is an 'Insert new value' field containing the number '5'. To the right of these fields is a numeric keypad with buttons for digits 1-9, '+/-', '0', '.', '<', 'Bksp', and '>'. The bottom navigation bar features a home icon on the left and a checkmark icon on the right.

Pic. 58

Insert the new value and press .


Start the tuning procedure with  key on the YCC main screen. Then run the machine: The tuning starts (bottom right the writing "Tuning run" appears). During the tuning each feeder measures and stores its yarn consumption during the machine turns of the pattern. This value is taken as reference consumption.

# 14 - YCC FUNCTION

Groups list	Status	Cons. reference	Actual cons.	% Reference dev.	% Actual dev.
All Feeders					
dispari	YCC_OK	7320	7429	10.0	1.49
pari	YCC_OK	10472	10392	10.0	-0.76

Pic. 59


In this case the tuning procedure lasts 10 machine turns. In the end the following writing marks the end of the procedure:

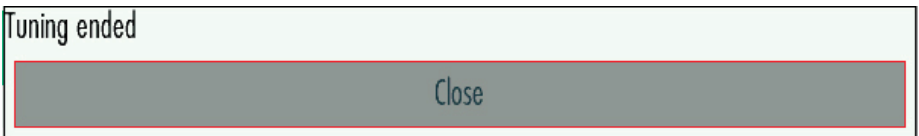

Pic. 60

# 14 - YCC FUNCTION

The machine keeps running and the system is now active:

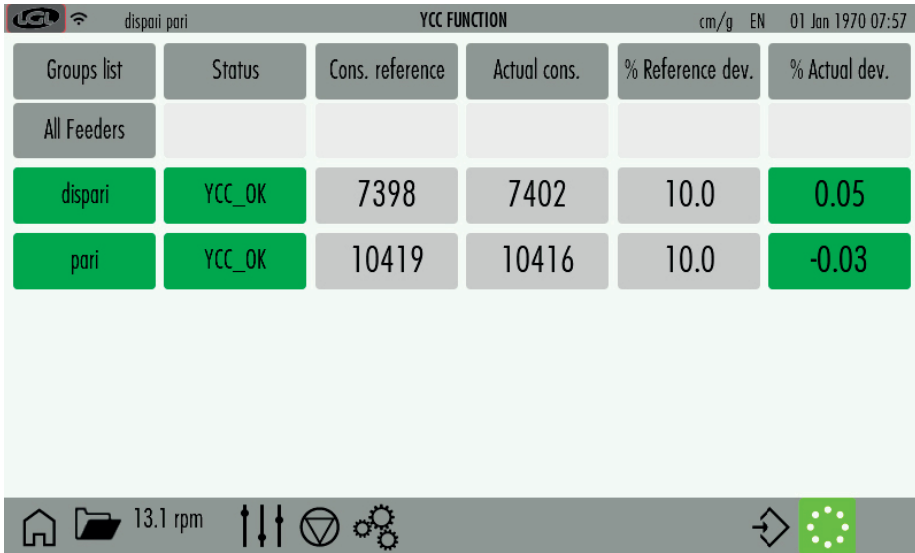

The screenshot displays a control interface for the YCC FUNCTION. At the top, it shows the system name 'dispari pari', the function title 'YCC FUNCTION', units 'cm/g', language 'EN', and a date/time stamp '01 Jan 1970 07:57'. Below this is a table with columns for 'Groups list', 'Status', 'Cons. reference', 'Actual cons.', '% Reference dev.', and '% Actual dev.'. The table lists two feeders: 'dispari' and 'pari'. Both are in a 'YCC\_OK' status. The 'dispari' feeder has a reference consumption of 7398 and an actual consumption of 7402, resulting in a 10.0% reference deviation and a 0.05% actual deviation. The 'pari' feeder has a reference consumption of 10419 and an actual consumption of 10416, resulting in a 10.0% reference deviation and a -0.03% actual deviation. At the bottom of the interface, there is a navigation bar with icons for home, a folder, '13.1 rpm', vertical sliders, a triangle icon, gears, a right arrow, and a green circular icon with dots.

Groups list	Status	Cons. reference	Actual cons.	% Reference dev.	% Actual dev.
All Feeders					
dispari	YCC_OK	7398	7402	10.0	0.05
pari	YCC_OK	10419	10416	10.0	-0.03

Pic. 61

## 14 - YCC FUNCTION

The read only parameter “%Actualdev.” defines how much the present yarn consumption deviates from the reference value (“%reference cons”). The parameter is updated once every machine turn. “%Actualdev.” key is green if its value is within the tolerance given by “%reference dev.”, it is yellow if its value is equal to “%reference dev.” and it is red if it is out of tolerance. An out of tolerance value stops the machine if the upper/lower check is enabled in the settings screen.

The values shown in the previous picture are the ones of the first feeder of each group (the feeder with the lowest address in each group).

Pressing the group key, the next screen appears:

dispari	Status	Cons. reference	Actual cons.	% Reference dev.	% Actual dev.
1 ECM2070	YCC_OK	7398	7318	10.0	-1.08
3 ECM2064	YCC_OK	7355	7277	10.0	-1.06
5 ECM2064	YCC_OK	6238	6329	10.0	1.46
7 ECM2064	YCC_OK	6091	6097	10.0	0.10
9 ECM2064	YCC_OK	7537	7645	10.0	1.43
11 ECM2064	YCC_OK	7289	7373	10.0	1.15

Pic. 62

This read only screen shows the values per feeder. The up and down arrows scroll the list.



To disable the YCC system press . The following message appears:




Pic. 63

## 14 - YCC FUNCTION


Pressing , the system disables the YCC function without saving the settings.

Pressing , or  on the YCC main screen, the system saves the settings data in one file:

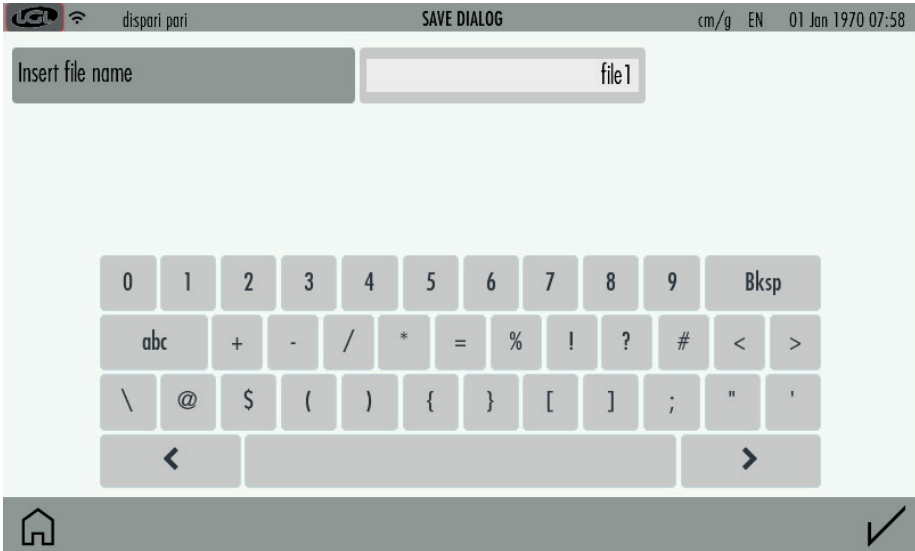

Pic. 64

Write the desired name and press .

A configuration file is saved. Recalling this file through the  key on the YCC main screen, The YCC parameters values are automatically loaded on the feeders and the YCC function is immediately enabled.

# 15 - CAM SETTINGS


(AVAILABLE FROM SOFTWARE VERSION 4.32)

This function makes machine CAMS adjustment easier, through the feeders' yarn consumption control.

A well-adjusted machine knitting a plain fabric has all yarn feeders consuming the same amount of yarn. If one or more feeds deviate from the average yarn consumption, the pertinent CAM must be adjusted.

Using storage feeders is recommended, as they are less influenced by the input tension.

Press :

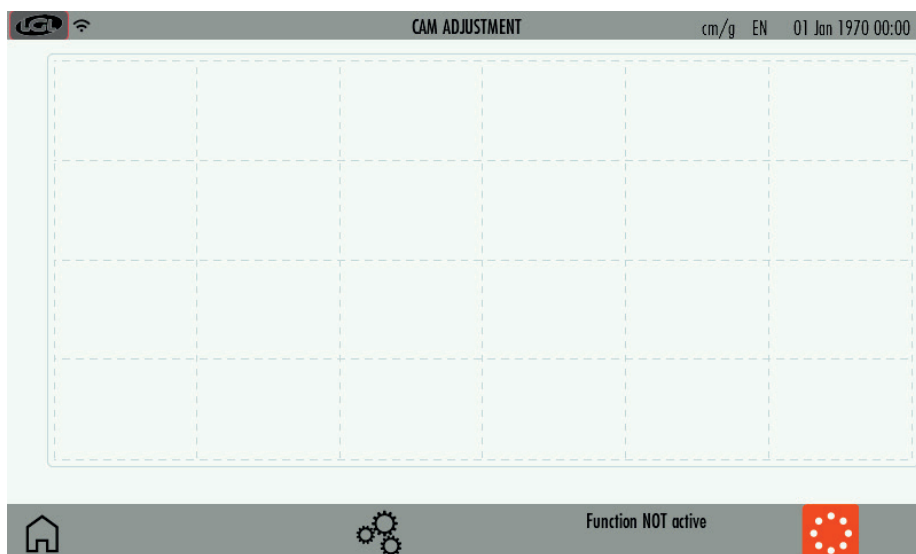


Pic. 65

# 15 - CAM SETTINGS

(AVAILABLE FROM SOFTWARE VERSION 4.32)

Press :

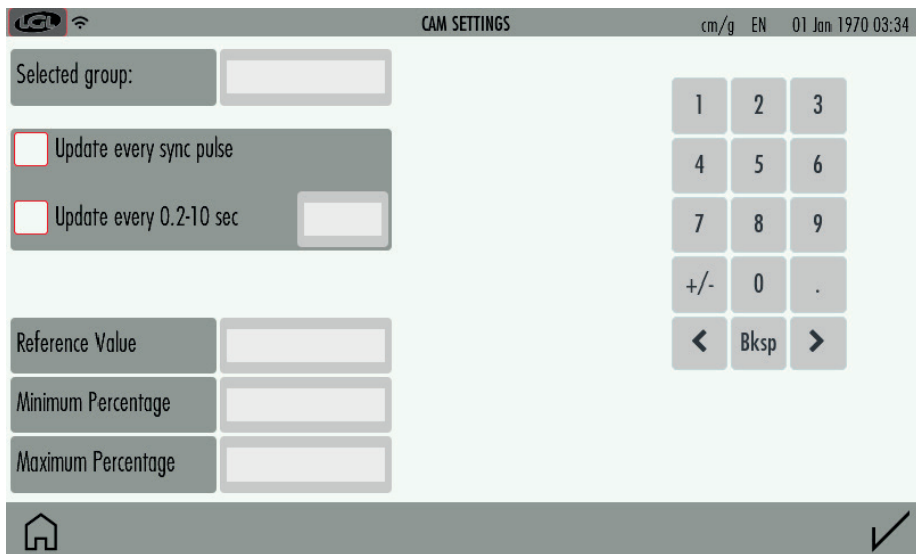

Selected group:

Update every sync pulse

Update every 0.2-10 sec

Reference Value

Minimum Percentage

Maximum Percentage



1 2 3

4 5 6

7 8 9

+/- 0 .

< Bksp >

Pic. 66

1. Select the feeders' group.
2. Choose the yarn consumption update timing (if the value is updated once every machine turn or once a time interval in seconds).
3. Insert a yarn consumption reference value (optional: cm or inch).
4. Insert a percentage tolerance above and below the reference value.

# 15 - CAM SETTINGS

(AVAILABLE FROM SOFTWARE VERSION 4.32)

Press .

As soon as the machine runs, a column chart will be created with the yarn consumption values of each feeder. If values at points 3 and 4 have been inserted, the columns will be green if the values are in tolerance, red if they are out of tolerance.

Example:




Pic. 67

# 15 - CAM SETTINGS

(AVAILABLE FROM SOFTWARE VERSION 4.32)

Selecting group "one" (in this case even feeders), the yarn consumption update once every 1 second, a reference value of 30, a 5% tolerance above and no tolerance below, the following diagram appears:

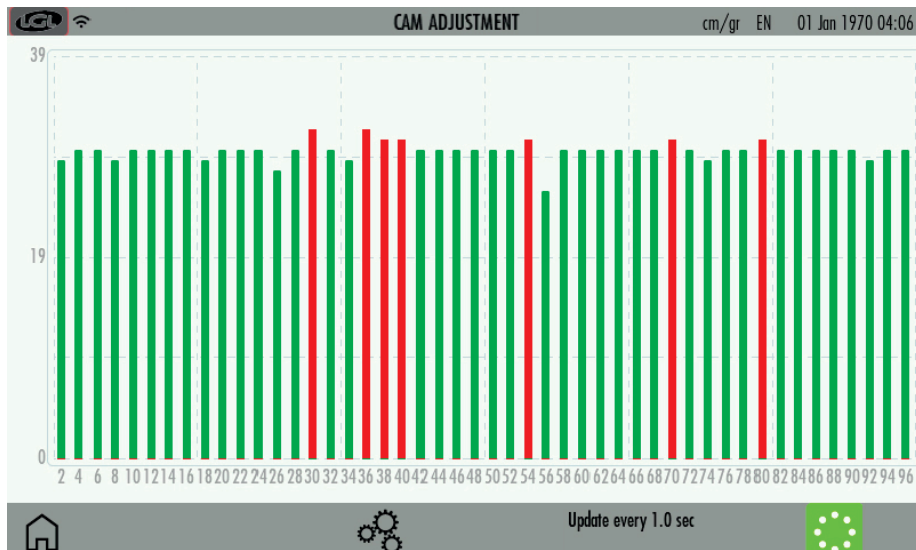


Pic. 68

Below reference, the columns are always green because no tolerance value has been inserted, while above reference the out of tolerance columns are red.

## 16 - WARPER FUNCTION (ONLY FOR TWIN FEEDERS)

This function is available only for Twin units, and it is required when the unit is installed on a warper in order to automatically set the feeders which are involved in the warp production and the ones which will not be used.

From main screen (picture 4) press  icon:

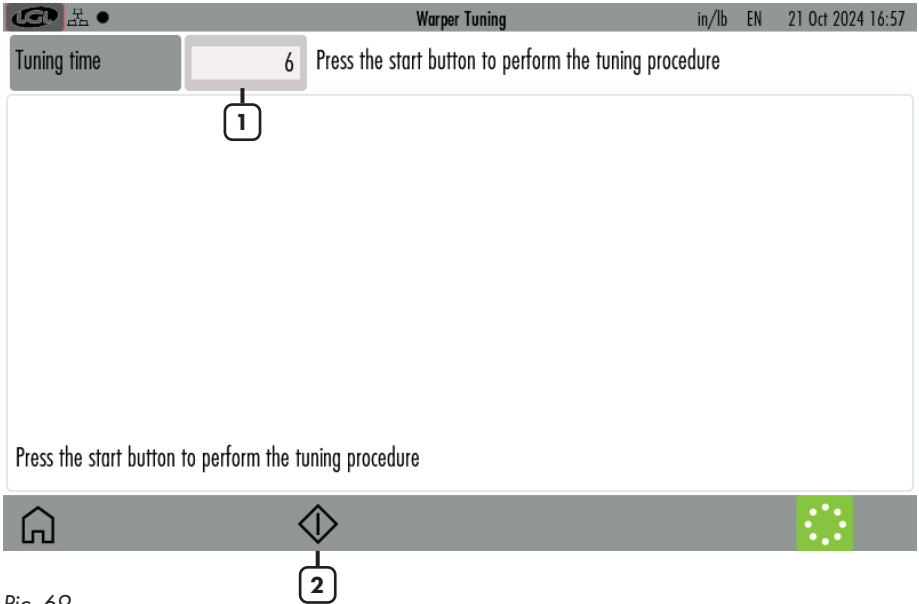


Pic. 69

- 1= Time of tuning (default 6 seconds).
- 2= Press to start tuning procedure. When the start button is pressed the stop button will appear to manually stop the tuning. Then start the machine.

## 16 - WARPER FUNCTION (ONLY FOR TWIN FEEDERS)

At the end of the tunin, the result will be shown in the following screen:

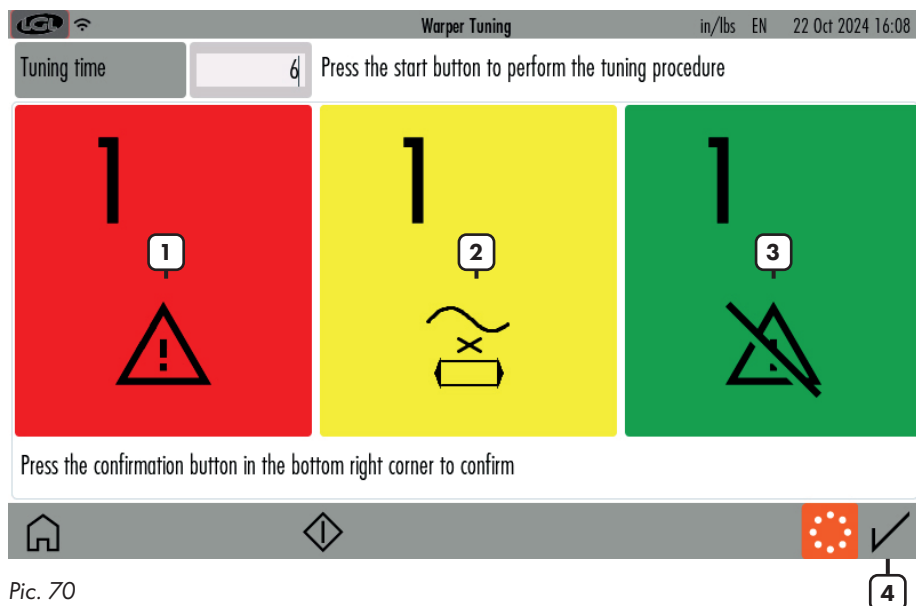

Pic. 70

- 1= Feeder in alarm (different from "YrnStanding A" )
- 2= Feeder in "Yrn Standing A"
- 3= Feeder not in alarm
- 4= Confirm button

If the result is as expected, press the confirmation button.


Once the tuning is over and the operator presses the confirmation button, all green feeders will be supposed to work in the next warp production, while the red and the yellow ones are not supposed to work.


This means that if one feeder which is supposed to work does not turn, it will stop the machine, as well as if one feeder that is not supposed to work is actually turning.

# 17 - DATA ANALYSIS AND REMOTE CONTROL


This function is available in combination with LGL KYC touch device from KYC software version 4.19.

Data Analysis consists in monitoring the feeders' parameters on the long run, with the target to offer predictive maintenance and suggestions to improve machines efficiency.

Remote control allows an LGL technician to check the feeders from remote in case of a problem. From main screen (picture 4) press  icon:

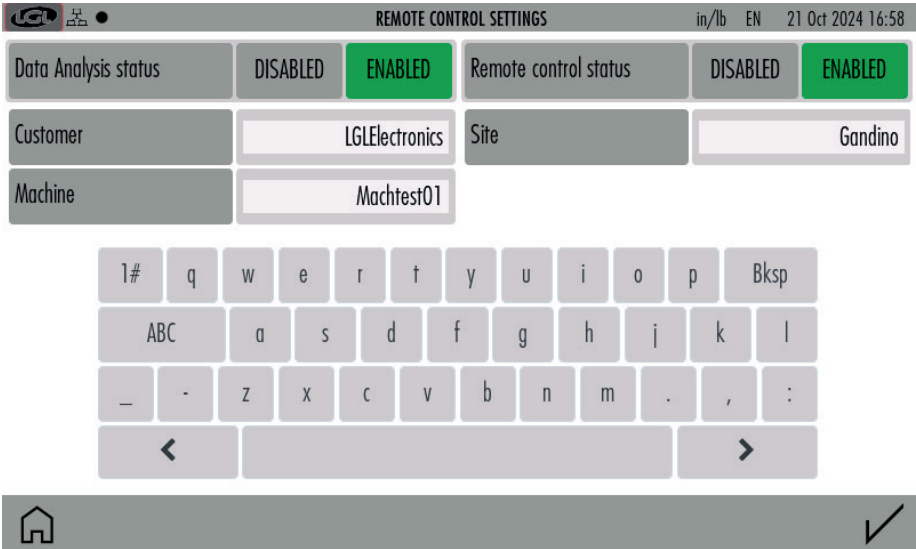


Pic. 71

If you want to enable data analysis, select enable with relative button, insert information about customer, site and machine and press  to confirm.

If you want to disable data analysis, select disable with relative button and press  to confirm.

If you want to enable remote control, select enable with relative button and press  to confirm.

If you want to disable remote control, select enable with relative button and press  to confirm.

Once confirm button  is pressed, the kyc device will recycle power to enable the changes.



Gandino BG 07/06/2024

## EU DECLARATION OF CONFORMITY DICHIARAZIONE DI CONFORMITÀ UE

We,  
Noi,

Manufacturer / *Fabbricante*: **LGL Electronics S.p.A.**  
Address / *Indirizzo*: Via Ugo Foscolo, 156  
24024 Gandino BG - Italy

**declare under our sole responsibility that the radio equipment**  
*dichiariamo sotto la nostra unica responsabilità che l'apparecchiatura radio*

Object of the Declaration: <i>(Identification of the radio equipment)</i> Oggetto della Dichiarazione: <i>(identificazione dell'apparecchiatura radio)</i>	Touch screen terminal
Type/Model: <i>Tipo/Modello</i> :	KYC TOUCH
Firmware Version: <i>Versione del Firmware del/dei modulo/i radio</i>	IW416-V0, RF878X, FP91, 16.91.10.p214, WPA2_CVE_FIX 1, PVE_FIX 1
Intended use: <i>Impiego previsto</i>	communication interface and gateway between yarn feeders installed on knitting machines and the user  interfaccia e gateway di comunicazione tra gli alimentatori di filo installati su macchine da maglieria e l'utente
Description of accessories and components which allow the radio equipment to operate as intended (approved antenna types, software, ...)	Antenna: Linx Technologies cod. ANT-DB1- LCD-RPS  Antenna: Linx Technologies cod. ANT-DB1- LCD-RPS

*Descrizione degli accessori e dei componenti che  
consentono all'apparecchiatura radio di funzionare  
come previsto (tipi di antenne approvate, software, ...)*

**is in conformity with the essential requirements of the Directive 2014/53/EU (RED) and of the  
Directive 2011/65/EU (RoHS II), including subsequent revisions and additions, as well as amended  
by the Delegated Directive 2015/863/EU (RoHS III).**

*è conforme ai requisiti essenziali della Direttiva 2014/53/UE (RED) e della Direttiva 2011/65/UE  
(RoHS II) comprese successive revisioni ed integrazioni, così come modificata dalla Direttiva*

*Delegata 2015/863/UE (RoHS III)."*

**The product has been tested according to the following standards or technical specifications:  
Il prodotto è stato testato in base alle seguenti norme o specifiche tecniche:**

1. Essential requirements for the protection of the health and safety of people, pets and goods, Article 3.1a) of Directive 2014/53/UE:  
*Requisiti essenziali per la protezione della salute e della sicurezza di persone e di animali domestici e beni, Articolo 3.1a) della Direttiva 2014/53/UE:*

EN IEC 62368-1:2020+A11:2020

EN IEC 62311:2020

2. Essential requirements on electromagnetic compatibility levels, Article 3.1b) of Directive 2014/53/UE:  
*Requisiti essenziali per i livelli di compatibilità elettromagnetica, Articolo 3.1b) della Direttiva 2014/53/UE:*

- ETSI EN 301 489-1 V2.2.3
  - ETSI EN 301 489-17 V3.2.4
- Additional standards:
- EN IEC 61000-6-2:2019
  - EN 61000-6-4:2007 + A1:2013

3. Essential requirements for the effective use of radio spectrum, Article 3.2 of Directive 2014/53/UE:  
*Requisiti essenziali per l'uso efficace dello spettro radio, Articolo 3.2 della Direttiva 2014/53/UE:*

- ETSI EN 300 328 V2.2.2
- ETSI EN 301 893 V2.1.1

4. Requirements of Directive 2011/65/UE (RoHS II) towards the maximum tolerated concentrations of the substances listed in Annex II as amended by the Delegated Directive 2015/863/EU (RoHS III):  
*Requisiti della Direttiva 2011/65/UE (RoHS II) nei confronti delle concentrazioni massime tollerate delle sostanze elencate nell'Allegato II come modificata dalla Direttiva Delegata 2015/863/UE (RoHS III):*


- EN IEC 63000:2018

The Notified Body Nemko S.p.A. performed the conformity assessment of the technical documentation according to the procedure of Annex III (Module B) of Directive 2014/53/EU and issued the EU-type examination certificate no. 2051-RED-242302.

*L'Organismo Notificato Nemko S.p.A. ha effettuato la valutazione della conformità della documentazione tecnica secondo la procedura di cui all'Allegato III (modulo B) della Direttiva 2014/53/UE e ha rilasciato il certificato di esame UE del tipo n° 2051-RED-242302.*

Signature of the Legal representative:

*Firma del Rappresentante legale:*





L.G.L. Electronics S.p.A. reserve the right to alter in any moment one or more specifications of his machines for any technical or commercial reason without prior notice and without any obligation to supply these modifications to the machines, already installed.

T +39 035 733 408 **L.G.L. Electronics S.p.A.**  
F +39 035 733 146 Via Ugo Foscolo, 156  
lgI@gl.it 24024 Gandino (BG)  
www.lgl.it Italy